


SCAG[®]

POWER EQUIPMENT

MODEL SSZ

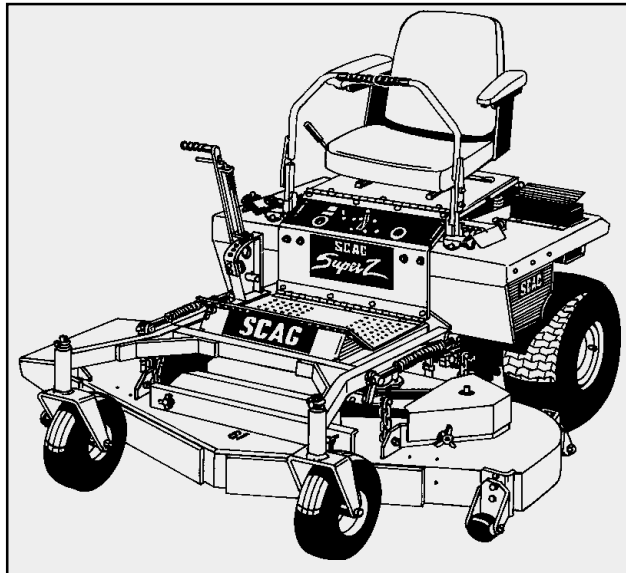

THIS MANUAL CONTAINS THE OPERATING INSTRUCTIONS AND SAFETY INFORMATION FOR YOUR SCAG MOWER. READING THIS MANUAL CAN PROVIDE YOU WITH ASSISTANCE IN MAINTENANCE AND ADJUSTMENT PROCEDURES TO KEEP YOUR MOWER PERFORMING TO MAXIMUM EFFICIENCY. THE SPECIFIC MODELS THAT THIS BOOK COVERS ARE CONTAINED ON THE INSIDE COVER. BEFORE OPERATING YOUR MACHINE, PLEASE READ ALL THE INFORMATION ENCLOSED.

OPERATOR'S MANUAL



WARNING:

FAILURE TO FOLLOW SAFE OPERATING PRACTICES MAY RESULT IN SERIOUS INJURY.

- * Keep all shields in place, especially the grass discharge chute.
- * Before performing any maintenance or service, stop the machine and remove the spark plug wire and ignition key.
- * If a mechanism becomes clogged, stop the engine before cleaning.
- * Keep hands, feet and clothing away from power-driven parts.
- * Read this manual completely as well as other manuals that came with your mower.

REMEMBER - YOUR MOWER IS ONLY AS SAFE AS THE OPERATOR!

Hazard control and accident prevention are dependent upon the awareness, concern, prudence, and proper training of the personnel involved in the operation, transport, maintenance, and storage of the equipment.

This manual covers the operating instructions
and illustrated parts list for:

SSZ-18, 20, and 22CV
with a serial number of XXX70001 - XXX79999

Always use the entire serial number listed on the serial number
tag when referring to this product.

Your mower was built to the highest standards in the industry. However, your mower is only as safe as you, the operator, make it. Carelessness or error on the part of the operator may result in serious bodily injury. Hazard control and accident prevention depend upon the awareness, concern, prudence, and proper training of the personnel involved in the operation, transport, and storage of this equipment. Make sure every operator is properly trained and thoroughly familiar with all of the controls and safety instructions before operating the equipment.

SAFETY INSTRUCTIONS



WARNING:

Do not operate mower on steep slopes. Riding lawn mowers can tip over when used on an excessive slope. To check a slope, attempt to back up with cutter deck down. If wheels slip when backing up slope, stay off the slope. If you are in doubt about hillside operation, stay off the slope.

Always back up when loading a machine on ramps or tilt bed trailers.

1. Know the controls and how to stop quickly. **READ THIS OPERATOR'S MANUAL** and instructions furnished with attachments. A replacement Operator's Manual is available from your Scag Servicing Dealer. To order, contact your dealer with the complete model number and serial number of your Scag product.
2. Do not allow children to operate this machine. Do not allow adults to operate this machine without proper instruction.
3. Do not carry passengers. Never mow toward or near anyone.
4. Clear the area of objects such as wires, sticks, and rocks that can be picked up and thrown by the mower blades.
5. Disengage all attachment clutches and engage parking brake before attempting to start the engine.
6. Disengage all attachment clutches and engage the parking brake before leaving the operator's position.
7. Disengage the power to attachments, stop the engine, and remove the key before making any repairs or adjustments.
8. Disengage the power to attachments when transporting the machine or when attachments are not being used.
9. Take all possible precautions when leaving the machine unattended including disengaging the power to attachments, lowering the attachments, setting the parking brake, and removing the key.
10. Do not stop or start suddenly when going up or down a hill. Mow up and down the face of slopes; never mow across slopes.
11. Reduce speed and be very careful when operating on slopes or making sharp turns to prevent tipping or loss of control. Be especially cautious when changing direction on slopes. If necessary to turn on a hill, always turn downhill.
12. Watch for holes, rocks, roots in the terrain, and other hidden hazards. Keep away from dropoffs.
13. Watch for traffic when crossing roadways or operating near roadways.
14. When using any attachments, never directly discharge materials towards bystanders or allow anyone near mower while it is operating.
15. Handle gasoline with care - it is highly flammable.
 - a. Use an approved gasoline container only.
 - b. Never remove the fuel cap while the engine is running or hot. Allow the engine to cool for several minutes before removing the cap and adding gasoline. Never fill the fuel tank indoors. Always clean up spilled gasoline.
 - c. Do not run the engine indoors.

SAFETY INSTRUCTIONS - CONT'D

16. Keep the machine and attachments in good operating condition. Make sure all safety devices and shields are in place and operate the equipment as intended.
17. Keep all nuts, bolts, and screws tight to be sure equipment is in safe operating condition.
18. Never store the equipment with gasoline in the tank in a building where fumes may reach an open flame or spark. Allow the engine to cool before storing the machine in any enclosure.
19. To reduce fire hazard, keep the engine free of grass, leaves, or excess lubricants.
20. If the machine or attachments strike a foreign object, disengage the power to the attachments and stop the engine immediately. Wait for all moving parts to stop, then inspect for damage. Repair the damage before restarting or operating the equipment.
21. Do not change the engine governor settings or overspeed the engine.
22. When using the machine with a mower:
 - a. Mow only in daylight or good artificial light.
 - b. Never dismount the machine to adjust the cutting height while the engine is running.
 - c. Shut the engine off and remove the key before removing the grass catcher or unclogging the chute.
 - d. Check the blade mounting bolts frequently for proper tightness.
23. Disengage the power to the blades before backing up. Do not mow in reverse unless absolutely necessary and then only after careful observation of the entire area behind the mower.
24. The discharge chute must be installed and be in the down position on a side discharge mower except when the optional grass catcher or the mulching plate is completely installed. If the discharge chute clogs, shut the engine off, remove the key, and wait for all movement to stop before removing any obstruction.
25. Perform only the maintenance described in this manual. If additional maintenance or major repairs are needed, contact an authorized Scag Servicing Dealer. To ensure optimum performance and safety, always purchase genuine Scag replacement parts and accessories. Never use "WILL FIT" replacement parts and accessories made by another manufacturer. Using such parts may void the warranty.



WARNING:

Do not operate the machine while wearing sandals, tennis shoes, sneakers, or shorts. Also, do not wear loose fitting clothing which could get caught in moving parts. Always wear long pants and substantial shoes. Wearing safety glasses and safety shoes is advisable.



CAUTION:

Stop engine and remove key from ignition before making any adjustments. Wait for all moving parts to come to a complete stop before beginning work.

Engine and drive unit can get hot during operation. Allow engine and drive components to cool before making any adjustments.



WARNING:

To prevent personal injury or equipment damage, do not operate the machine without the cutter deck properly mounted.

HYDRAULIC SAFETY

1. Hydraulic fluid is under high pressure. If you need service on your hydraulic system, please see your dealer.



WARNING:

Keep body and hands away from pin holes or nozzles that eject fluid under high pressure. Use paper or cardboard, not hands, to search for leaks.

Hydraulic fluid escaping under high pressure may have sufficient force to penetrate your skin and cause serious injury. If fluid is injected into your skin, a physician familiar with this form of injury must remove it surgically within a few hours or gangrene may result.

2. Make sure all hydraulic fluid connections are tight and all hoses and lines are in good condition before applying pressure to the system.

ADJUSTMENTS

Neutral Adjustment

1. Set the machine up on jack stands so the drive wheels are free to rotate. Block the caster wheels to prevent an accident if the machine should accidentally fall off the jack stands.
2. **Run Position:** Move the dump valve lever (on Left Hand side of mower) behind the hook on the frame to close hydraulic dump valves on the pump. (See Figure 1)

Free Wheel Position: Pull lever back and to the left, then push forward to relieve pressure. (See Figure 1)

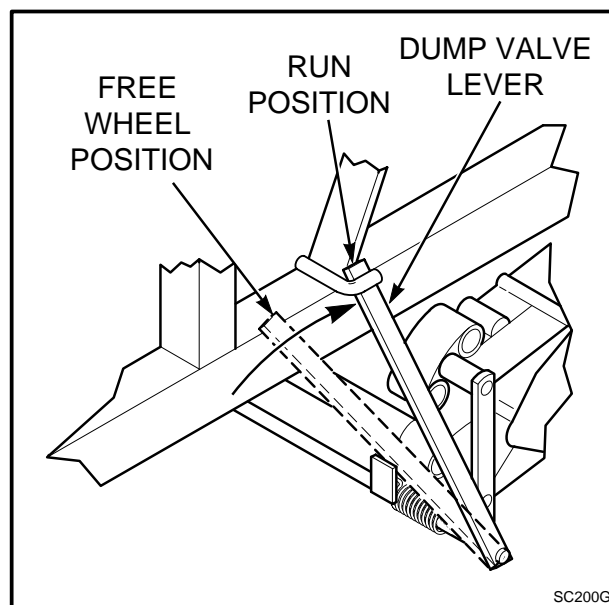


Figure 1

3. Start the engine and check if one or both of the drive wheels are turning.
4. Adjust each drive wheel separately by using the turnbuckles located under the seat. Loosen the jam nut on the turnbuckle. (See Figure 2)
5. If the drive wheel is rotating forward, adjust the turnbuckle clockwise. If the drive wheel is rotating rearward, adjust the turnbuckle counterclockwise. Adjust until the drive wheel stops turning. (See Figure 2)

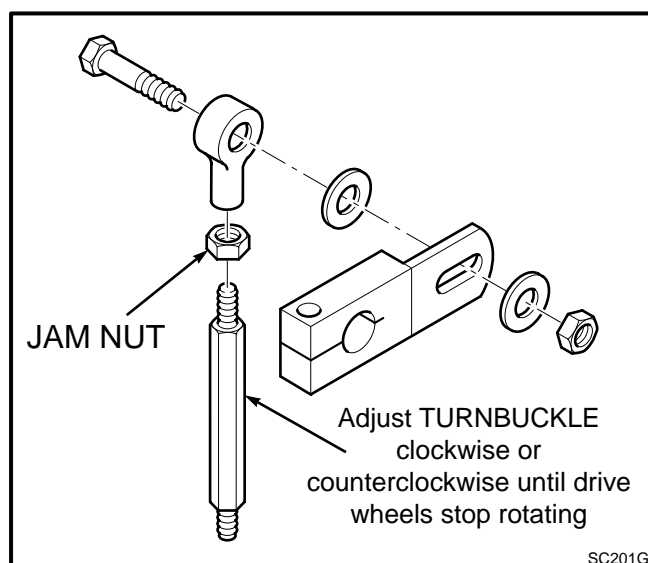


Figure 2

ADJUSTMENTS - CONT'D

Neutral Adjustment Cont'd

6. Tighten the jam nut to secure the **neutral** position.
7. Adjust the other drive wheel if necessary.
8. Actuate the hand control levers forward and reverse. Allow the levers to self-center and check that the drive wheels remain in neutral.

NOTE: The neutral return mechanisms on the fenders are adjusted at the factory. Readjustment should not be necessary.

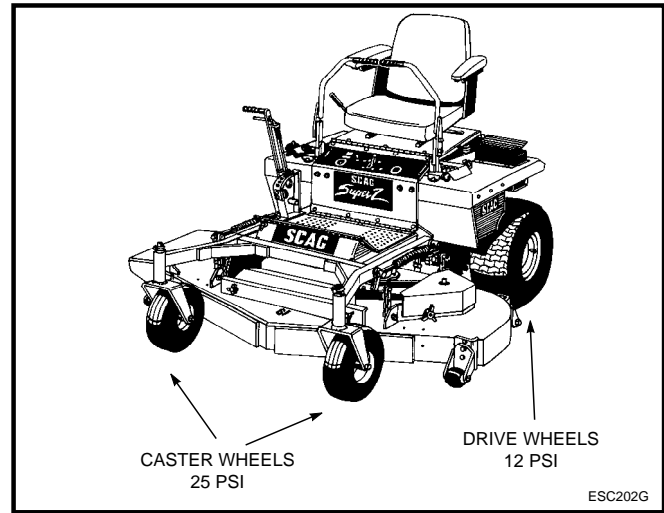


Figure 3

Straight Line Running Adjustment

CAUTION:

Stop engine and remove key from ignition before making any adjustments. Wait for all moving parts to come to a complete stop before beginning work.

Engine and drive unit can get hot during operation. Allow engine and drive components to cool before making any adjustments.

1. Before making this adjustment, check the tire pressure of the drive wheels. Tire pressure for each wheel must be equal. (See Figure 3) If the tire pressures are not equal, the machine will pull to the side with the lower tire pressure.

NOTE: Make this adjustment only on the LH pump. The RH pump has a fixed speed and cannot be adjusted.

2. Locate the turnbuckle for LH pump under the operator seat in front of the hydraulic oil tank. (See Figure 4)
3. Loosen nut securing turnbuckle to bellcrank. (See Figure 4)

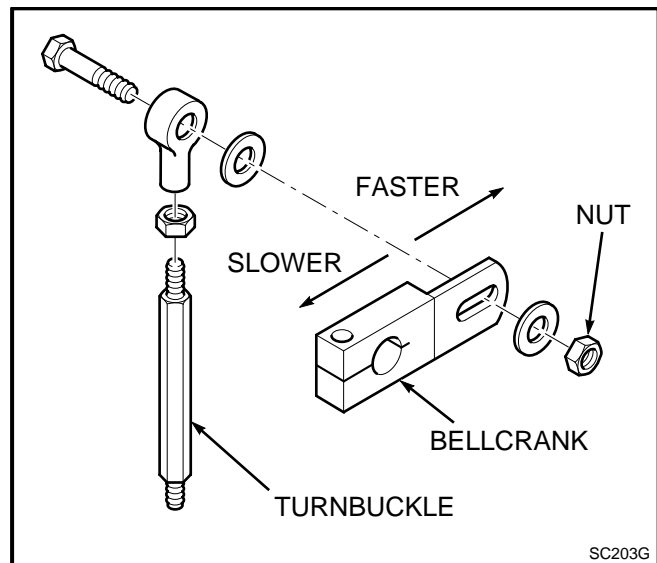


Figure 4

ADJUSTMENTS - CONT'D

Straight Line Running Adj. - Cont'd

4. Adjust position of turnbuckle by moving it in mounting slot either forward to slow left wheel or backward to speed up left wheel. If unit pulls to the right, left wheel is too fast. If unit pulls to the left, left wheel is too slow.
5. Tighten nut to secure turnbuckle.
6. Readjust neutral if necessary. (See Figure 2)

Cutter Deck Drive Belts



CAUTION:

Stop engine and remove key from ignition before making any adjustments. Wait for all moving parts to come to a complete stop before beginning work.

1. Lift foot plate and secure with foot plate support rod.
2. To adjust cutter deck drive belt: Adjust until end of spring aligns with end of L-shaped bracket. (See Figure 5)

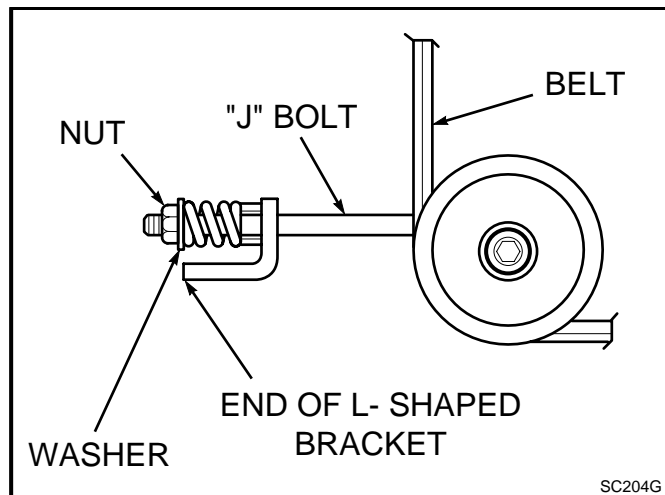


Figure 5

NOTE: Due to initial belt stretching, check this adjustment after the first 2 hour, 4 hour, and 8 hour intervals.

3. To adjust RH blade drive belt: Adjust RH belt tension so belt moves 1/2" with 10 pounds pressure. Adjust tension by tightening or loosening J-bolt. (See Figure 6 for SMZ-52; See Figure 7 for SMZ-61 & SMZ-48)
4. Carefully unlatch foot plate support rod and lower foot plate.

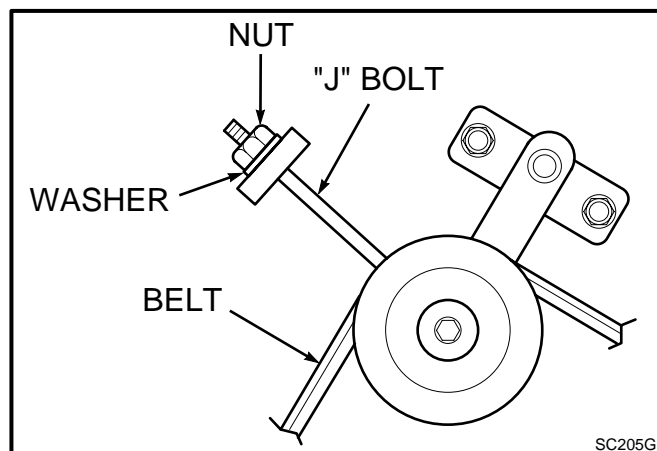


Figure 6 - SMZ-52

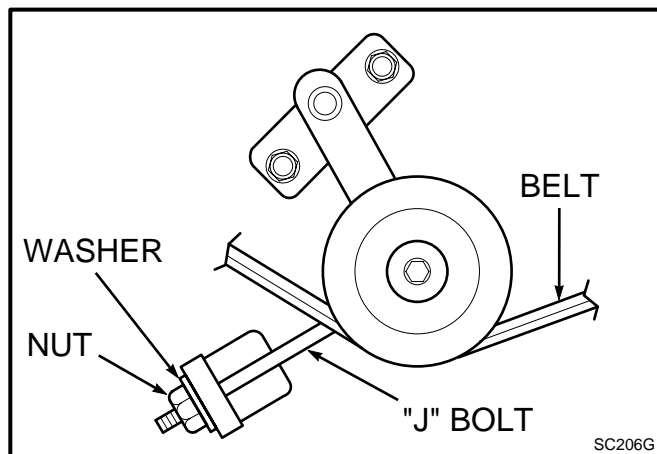


Figure 7 - SMZ-61 & SMZ-48

ADJUSTMENTS - CONT'D

Drive Belt Replacement



CAUTION:

When replacing the drive system belt use extreme caution. The idler arm is under spring tension.

Remove the two 1/4" nuts on the belt guard and remove the guard. To remove the old belt, use a 1/2" drive breaker bar and insert it into the square hole on the idler arm. Pull the idler arm down until the belt becomes slack and can be removed easily from the idler pulley. Slowly move the idler arm up until the stop bolt rests against the hydraulic tank support. Remove the old belt and mount the new belt around the engine drive pulley and the two pump pulleys. Feed the belt up toward the idler pulley.

Pull the idler arm down so that the new belt can easily be mounted on the idler pulley. Slowly move the idler arm up until the belt is firmly engaged. Remove the breaker bar and remount the belt guard. Check to ensure that the belt is riding properly in all pulleys.

Hand Control Handle Position

The position of the hand control handles can be adjusted for operator comfort. Loosen the bolts holding the handle to the lever bar just enough to allow movement of the handle. Adjust to position most comfortable for operator. Retighten bolts.

INITIAL RUN, INSPECTION, AND OPERATING INSTRUCTIONS

1. Check that all belts are routed correctly.
2. Check cutter blade drive belts for correct tension.

3. Make sure the engine oil level (10W30) is at FULL on the dipstick. When performing oil changes, fill the engine to the full mark on the engine dipstick. (Approximately 2 quarts will be needed for Kohler engines) DO NOT OVERFILL.
4. Check the oil level (SAE 20W50) in the hydraulic reservoir. The reservoir is under the seat. The oil level should be 2" below the top of the tank. When performing oil changes, fill the reservoir until 2" below top of tank. (Approximately 4 quarts will be needed) DO NOT OVERFILL.
5. Check that all fasteners are tightened properly. Make sure all safety devices are in place and working correctly.



WARNING:

Gasoline is highly flammable. Be careful when filling tank. Do not fill tank while engine is running or hot from operation. Extinguish open flames, matches, and smoking materials before filling tank. Do not overfill tank. Wipe up all gasoline spills.

6. Fill the fuel tank with clean, fresh, lead-free gasoline with a minimum octane rating of 87.
7. Check the safety interlock system. With the operator on the seat, the engine must not start unless the control handles are in the neutral lock position and the cutter drive is disengaged.

IMPORTANT: If the engine is running, the engine must stop if the operator leaves the seat when one or both handles are in the drive position or the cutter drive is engaged.

INITIAL RUN, INSPECTION, AND OPERATING INSTRUCTIONS - CONT'D

8. To start the engine:
 - a. The operator must be sitting in the seat.
 - b. Place control handles in neutral lock position.
 - c. Pull mower engagement switch to off position.
 - d. Put parking brake in engaged position.
 - e. Adjust throttle and choke as required.
 - f. Turn ignition key to start. Release ignition key when engine starts. Key will return to RUN position.
9. Pull the mower engagement switch out and push it forward to engage the cutter drive belts. (See Figure 8) Allow the belts to run for five minutes.

NOTE: For best belt life, engage the clutch at half throttle and not under load.

NOTE: When the PTO is engaged (or possibly disengaged), a squealing sound from the under side of the machine is normal. It is caused by the electric clutch plates meshing as the mower comes up to speed.

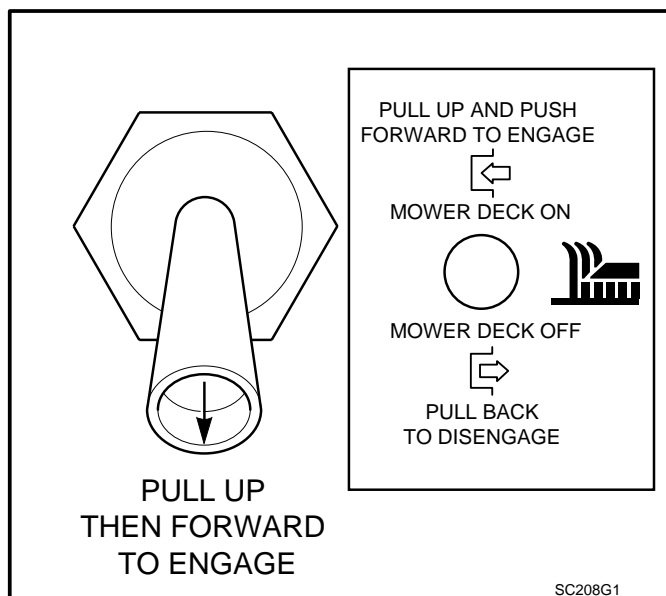


Figure 8

10. Release the parking brake. Check that the machine does not creep forward or backward. If the machine does creep, adjust the neutral control. See "Neutral Adjustment" instructions.

CAUTION:

CAUTION: Stop engine and remove key from ignition before making any adjustments. Wait for all moving parts to come to a complete stop before beginning work.

Engine and drive unit can get hot during operation. Allow engine and drive components to cool before making any adjustments.

11. Operate the machine forward and backward. Check that all the systems function correctly. If the machine does not move, make sure the hydraulic dump valve lever near the left wheel is engaged. (See Figure 1 page3)

To engage the parking brake, move the lever up and out into the bracket. To disengage the parking brake, pull the lever up and in, away from the bracket. (See Figure 9)

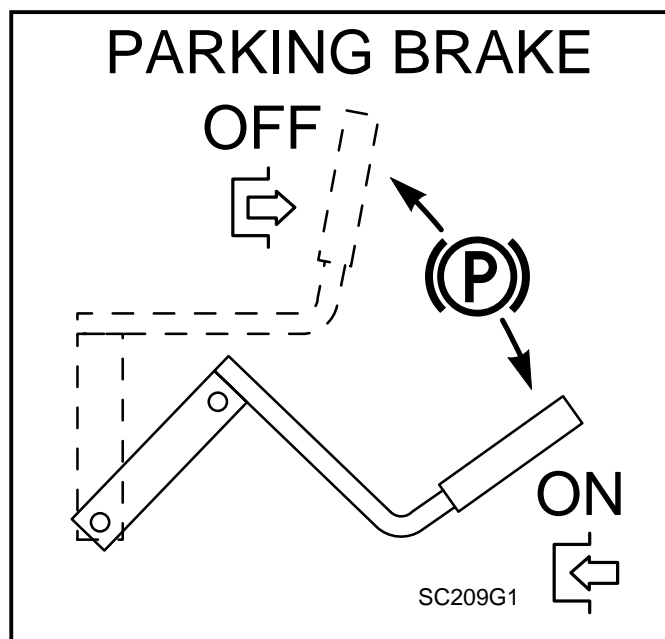


Figure 9

INITIAL RUN, INSPECTION, AND OPERATING INSTRUCTIONS - CONT'D

12. Shut off the engine, remove the key from the ignition, and wait for all moving parts to stop. Recheck the cutter deck drive belts for proper tension. Correct and adjust as necessary.
13. Park the machine on a level area, set the parking brake, and remove the key from the ignition to prevent engine starting.
14. Before transporting the machine, latch the seat stop cable to avoid damage to the seat.

MAINTENANCE

Free Wheeling

To release the drive wheels, so the machine will roll without the engine running, pull the dump valve lever back from the hook on the frame, move it to the left, and push it forward to relieve the pump pressure. The lever is on the LH side of the machine. (See Figure 1 on page 3)

Cutter Blades



WARNING:

Blade is sharp! Blade at rest can cause severe cuts. Rotating blade can cut fingers off. Always lift deck using handles provided.

Sharpen blades as shown on Figures 10 and 11.

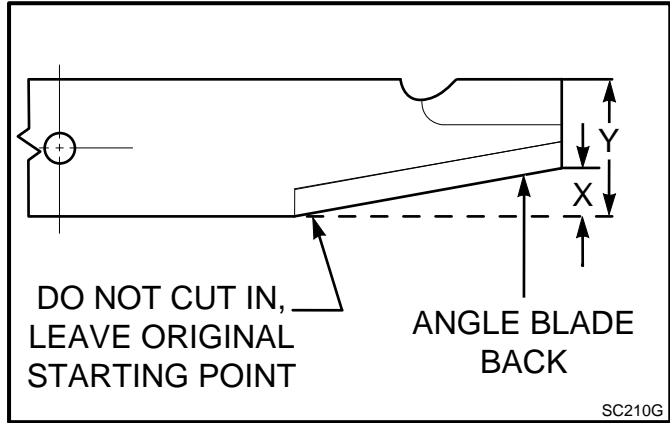


Figure 10

Do not sharpen (X) beyond 1/3 of blade width (Y).

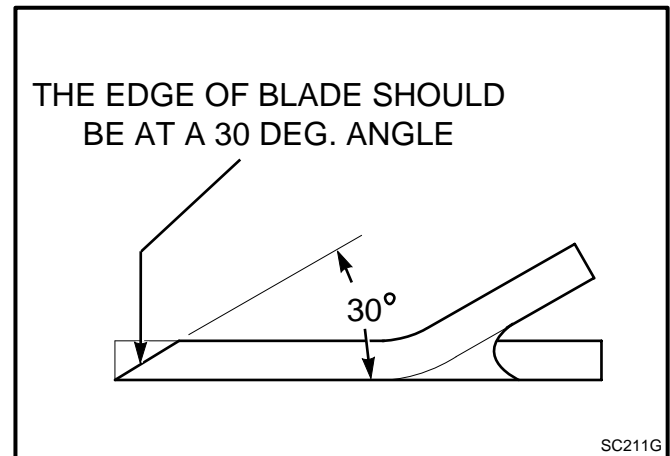


Figure 11

Suggestion: Dress blade with a file. Wheel grinder may burn the blade.

MAINTENANCE - CONT'D

Curb Climbing

When driving a riding mower up and over a curb, first raise the cutter deck to the highest position. Then, drive in reverse and at an angle so that the back drive wheels go over the curb one at a time. When both drive wheels are over the curb, turn the machine so that both front caster wheels contact the curb at the same time.

(See Figure 12)

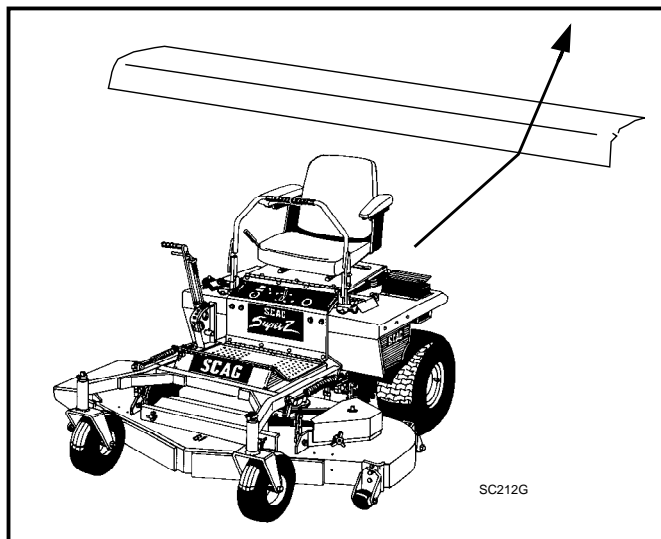


Figure 12

LUBRICATION & MAINTENANCE

Break-In			
X X X	8 hours (Daily)		
	40 hours (Weekly)		
	100 hours (Biweekly)		
	200 hours (Monthly)		
X X X X X - X X	X X X X X - X X	Procedure	Comments
		Check all hardware for proper tightness Change engine oil and filter at 5 hours Check belt tension	See engine manufacturer information 2 hour, 4 hour, and 8 hour intervals.
		Check engine oil level Remove debris from oil cooler Clean hydraulic pump cooling fins Remove debris from under belt cover Sharpen cutter blades Grease spindle bearings (2 pumps of hand gun) Clean air filter Check tire pressure	Do not overfill See engine manufacturer information MORE OFTEN IF NEEDED MORE OFTEN IF NEEDED MORE OFTEN IF NEEDED + US Lithium MP White Grease 2125 MORE OFTEN IF NEEDED Add air if necessary
		Check battery acid level Check belt tension	Use distilled water only Adjust as needed.
X X X X X X X X X X	X X X X X X X X X X	Replace air filter Change engine oil Grease caster wheel bearings Grease caster wheel pivots Grease idler arm pivots Grease push arms Grease control levers Grease bell crank Grease height adjustment	MORE OFTEN IF NEEDED See engine manufacturer information Chassis grease - Qty 2 Chassis grease - Qty 2 Chassis grease - Qty 3 Chassis grease - Qty 2 Chassis grease - Qty 2 Chassis grease - Qty 2 Chassis grease - Qty 4 Chassis grease - Qty 1
		X Check all hardware for proper tightness X Change engine oil filter X Check hydraulic fluid reservoir level X Clean and adjust spark plugs	See engine manufacturer information Add oil if needed (SAE 20W50) See engine manufacturer information
		Every 500 hours (Bimonthly) Drain hydraulic system and replace fluid Change hydrostatic oil filter * Adjust air gap on electric clutch	Use SAE 20W50 motor oil Clean area before removing filter Contact your Scag dealer for information about making this adjustment

*** IMPORTANT: Use only Scag Authorized part for proper filtration.**

+ Compatible Greases:

Lidok EP #2 (found at industrial shops)




Ronex MP (Exxon service stations)

Shell Alvania (Shell service stations)




Mobilux #2 (Mobil service stations)

Super Lube-M EP #2 and Super Lube-M #2 (Conoco service stations)




TROUBLESHOOTING CUTTING CONDITIONS

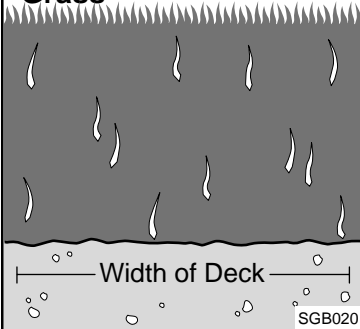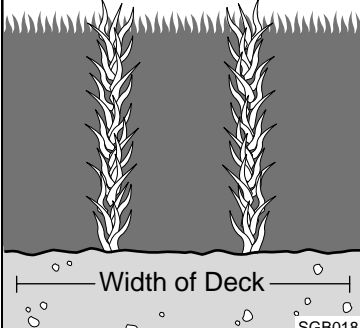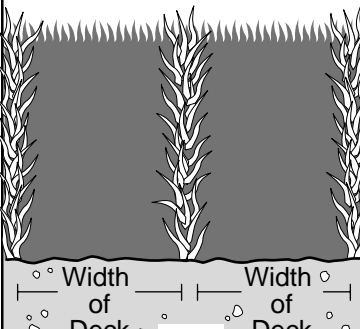CONDITION	CAUSE	CURE
Stringers - Occasional Blades of Uncut Grass 	Low engine RPM	Run engine at full 3600 RPM
	Ground speed too fast	Slow speed to adjust for conditions
	Wet grass	Cut grass after it has dried out
	Dull blades, incorrect sharpening	Sharpen blades
	Deck plugged, grass accumulation	Clean underside of deck
	Belts slipping	Adjust belt tensions
Streaking - Strips of Uncut Grass in Cutting Path 	Dull, worn blades	Sharpen blades
	Incorrect blade sharpening	Sharpen blades
	Low engine RPM	Run engine at full 3600 RPM
	Belt slipping	Adjust belt tension
	Deck plugged, grass accumulation	Clean underside of deck
	Ground speed too fast	Slow speed to adjust for conditions
	Wet grass	Cut grass after it has dried out
	Bent blades	Replace blades
Streaking - Strips of Uncut Grass Between Cutting Paths 	Not enough overlapping between rows	Increase the overlap of each pass

TROUBLESHOOTING

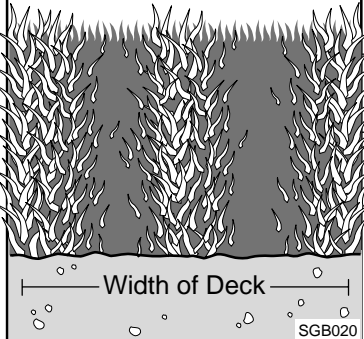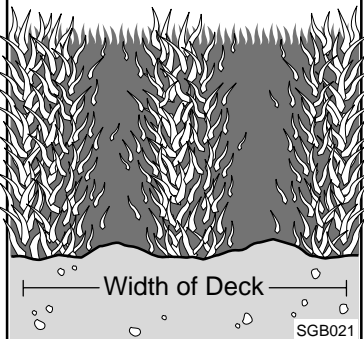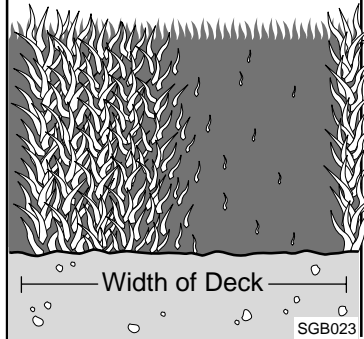CONDITION	CAUSE	CURE
Uneven Cut on Flat Ground - Wavy High-Low Appearance, Scalloped Cut, or Rough Contour 	Lift worn off of blade	Replace blade
	Blade upside down	Mount with cutting edge toward ground
	Deck plugged, grass accumulation	Clean underside of deck
	Too much blade angle (deck pitch)	Adjust pitch and level
	Deck mounted improperly	See your authorized SCAG dealer
	Bent spindle area	See your authorized SCAG dealer
	Dull blade	Sharpen blade
Uneven Cut on Uneven Ground - Wavy Appearance, High-Low Scalloped Cut, or Rough Contour 	Uneven ground	May need to reduce ground speed, raise cutting height, and/or change direction of cut
Sloping Ridge Across Width of Cutting Path 	Tire pressures not equal	Check and adjust tire pressure
	Wheels uneven	Check and adjust tire pressure
	Deck mounted incorrectly	See your authorized SCAG dealer

TROUBLESHOOTING

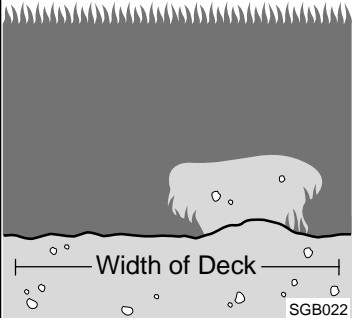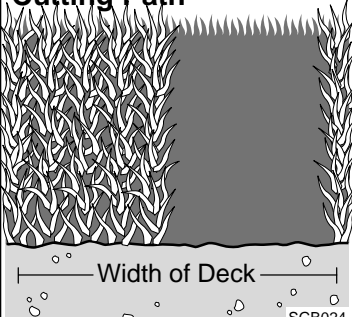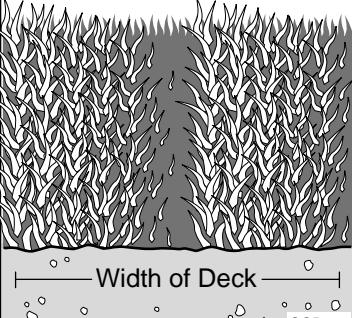CONDITION	CAUSE	CURE
Scalping - Blades Hitting Dirt or Cutting Very Close to the Ground 	Low tire pressures	Check and adjust pressures
	Ground speed too fast	Slow speed to adjust for conditions
	Cutting too low	May need to reduce ground speed, raise cutting height, change direction of cut, and/or change pitch and level
	Rough terrain	May need to reduce ground speed, raise cutting height, and/or change direction of cut
	Ground speed too fast	Slow speed to adjust for conditions
	Wet grass	Cut grass after it has dried out
Step Cut Ridge in Center of Cutting Path 	Blades not mounted evenly	Adjust pitch and level
	Bent blade	Replace blade
	Internal spindle failure	See your authorized SCAG dealer
	Mounting of spindle incorrect	See your authorized SCAG dealer
Slope Cut - Sloping Ridges Across Width of Cutting Path 	Bent spindle mounting area	See your authorized SCAG dealer
	Internal spindle failure	See your authorized SCAG dealer
	Bent deck housing	See your authorized SCAG dealer



SPECIFICATIONS FOR SCAG SSZ ZERO-TURN RIDER

MODELS:SSZ-18CV, SSZ-20CV, SSZ-22CV, ALL SSZ-LT

ENGINE

General Type:	Heavy duty industrial/commercial
Brand:	Kohler
Model:	Kohler 18CV, 20CV, 22CV Command Vertical Engine
Horsepower:	18HP, 20HP, 22HP @ 3600 RPM
Type:	4 cycle gas, twin cylinder, vertical shaft engine
Displacement:	18HP=624 cc, 20HP=624cc, 22HP=624cc
Cylinders:	2 cast-iron sleeves
Governor:	Mechanical type governor with variable speed control set at 3600 rpm (\pm 100rpm), idle set at 1400 rpm
Air Cleaner:	Large capacity dual element, chopper-type grass screen
Exhaust:	Single exhaust canister muffler
Fuel Pump Group:	Mechanical fuel pump with inline fuel filter, fixed jet carburator with Smart- Choke™ and fuel shutdown solenoid
Valve Group:	Kohler-hydraulic valve lifters standard
Starter/Electrical:	12 volt battery with alternator, solid state ignition with key start
Charging System:	15 amp

ENGINE DECK

Fuel Tank:	5 gallon (19.0 litres) seamless polyethylene tank with fuel gauge gas cap
Drive Wheels/Tires:	20x10.0-8 four-ply pneumatic tubeless, radius edge, offset rims to improve operator's view SSZ-LT=22x11.0-8 four-ply pneumatic tubeless, radius edge
Parking Brake:	Lever operated integral disc brake
Frame:	Compact tractor frame with structural steel tubing construction

DRIVE SYSTEM

Type:	Hydro drive with two hydrostatic transmissions for independent control of each drive wheel
Hydrostatic Transmissions:	Two Hydro-Gear Model #BDU 10L with integral pump/motor and axle
Transmission Belt Idler:	Self-adjusting, self-tightening
Dump Valve:	Single lever, allows for movement without engine running
Hydro Fluid Cooling Group:	6 qt. capacity nylon fluid reservoir, uses SAE 20W50 fluid and 10 micron filter, fan driven off pump drive belt cools fins on pump/motor transmission
Steering/Travel Control:	Twin lever fingertip steering control with individual control to each wheel
Axles:	1" heavy-duty, heat-treated flanged axle
Wire Harness:	14 gauge wire
Safety Group:	Seat actuated engine kill, neutral interlock, mower engagement (BBC) switch with interlock
Instrument Panel:	Ammeter, hour meter, key switch, throttle, fuses, manual choke, BBC switch
Forward Speed Range:	0 to 6.8 mph
Reverse Speed Range:	0 to 3.5 mph

Date of Issue: September 26, 1996

Specifications Subject to Change Without Notice

SPECIFICATIONS FOR SCAG SSZ ZERO-TURN RIDER

MODELS:SSZ-18CV,SSZ-20CV, SSZ-22CV, ALL SSZ-LT

CUTTER DECK

Type:

SMZ 48, SMZ 52, SMZ 61

Construction:

Floating, adjustable, anti-scalping, hybrid design combines out-front and belly-mount designs

True Cutting Width:

10-gauge steel with 7-gauge (3/16") steel skirt

Cutting Height Adjustment:

48.0" (122.0 cm), 52" (132.0 cm), 61: (155.0 cm)

Hand operated lever adjustment from operator's seat, 1-3/4" to 4-1/2" in 1/2" increments

Cutter Blades:

SSZ-LT=2-1/4" to 5-1/4" in 1/2" increments

.204 thick, milled edge, 5150 alloy steel

SMZ 48: Three (3) 16.5" blades

SMZ 52: Three (3) 18 blades

SMZ 61: Three (3) 21" blades

Blade Engagement:

Electric blade engagement clutch with control panel switch

Discharge Opening:

Extra wide 11.5" discharge opening with spring loaded discharge chute

Caster Wheels:

12x 3.5" with quick pin removal

Spindles:

Heavy duty 1-1/8" top dimension spindle shaft, cast housing, taper roller bearing, low maintenance with top access grease fitting and grease overfill relief poppet

Spindle Pulleys:

Cast-iron with easily removed taper hubs

Cutter Deck Belts:

B-section with Kevlar cord

ADDITIONAL SPECIFICATIONS

Seat:

Thick cushion with padded with arm rests

OPTIONAL ITEMS/ATTACHMENTS

Grass Catcher:

Spindle driven GC-SSZ-48 has 48 gallon capacity molded plastic hopper. GC-SSZ-6KH has 6 HP Kohler auxillary engine, 48 gallon capacity molded plastic hopper.

Mulching Plate:

Steel plate fits over discharge opening. No blade change or removal required. Installs and removes in the field.

APPROXIMATE DIMENSIONS

Length:

SMZ 48

SMZ 52

SMZ 61

Tracking Width:

72.0"

77.0"

77.0"

Width:

46.0"

49.0"

49.0"

Width (with discharge chute up):

59.0"

64.5"

73.5"

Height:

49.0"

53.0"

62.0"

Turning Radius:

48.0"

51.0"

51.0"

Weight:

zero

zero

zero

Weight with GC-SSZ-48:

790 lbs.

835 lbs.

865 lbs.

Width with GC-SSZ-48

1060 lbs.

59.0"

Length with GC-SSZ-48:

78.0"

Weight with GC-SSZ-6KH:

1055 lbs.

1085 lbs.

Width with GC-SSZ-6KH:

73.5"

82.5"


Length with GC-SSZ-6KH:

83.0"

83.0"

NOTE: SSZ-LT models have same specifications as respective models above except the height measurement. Add 1" to the height of the above specification for SSZ-LT models.

48", 52" & 61" CUTTER DECKS

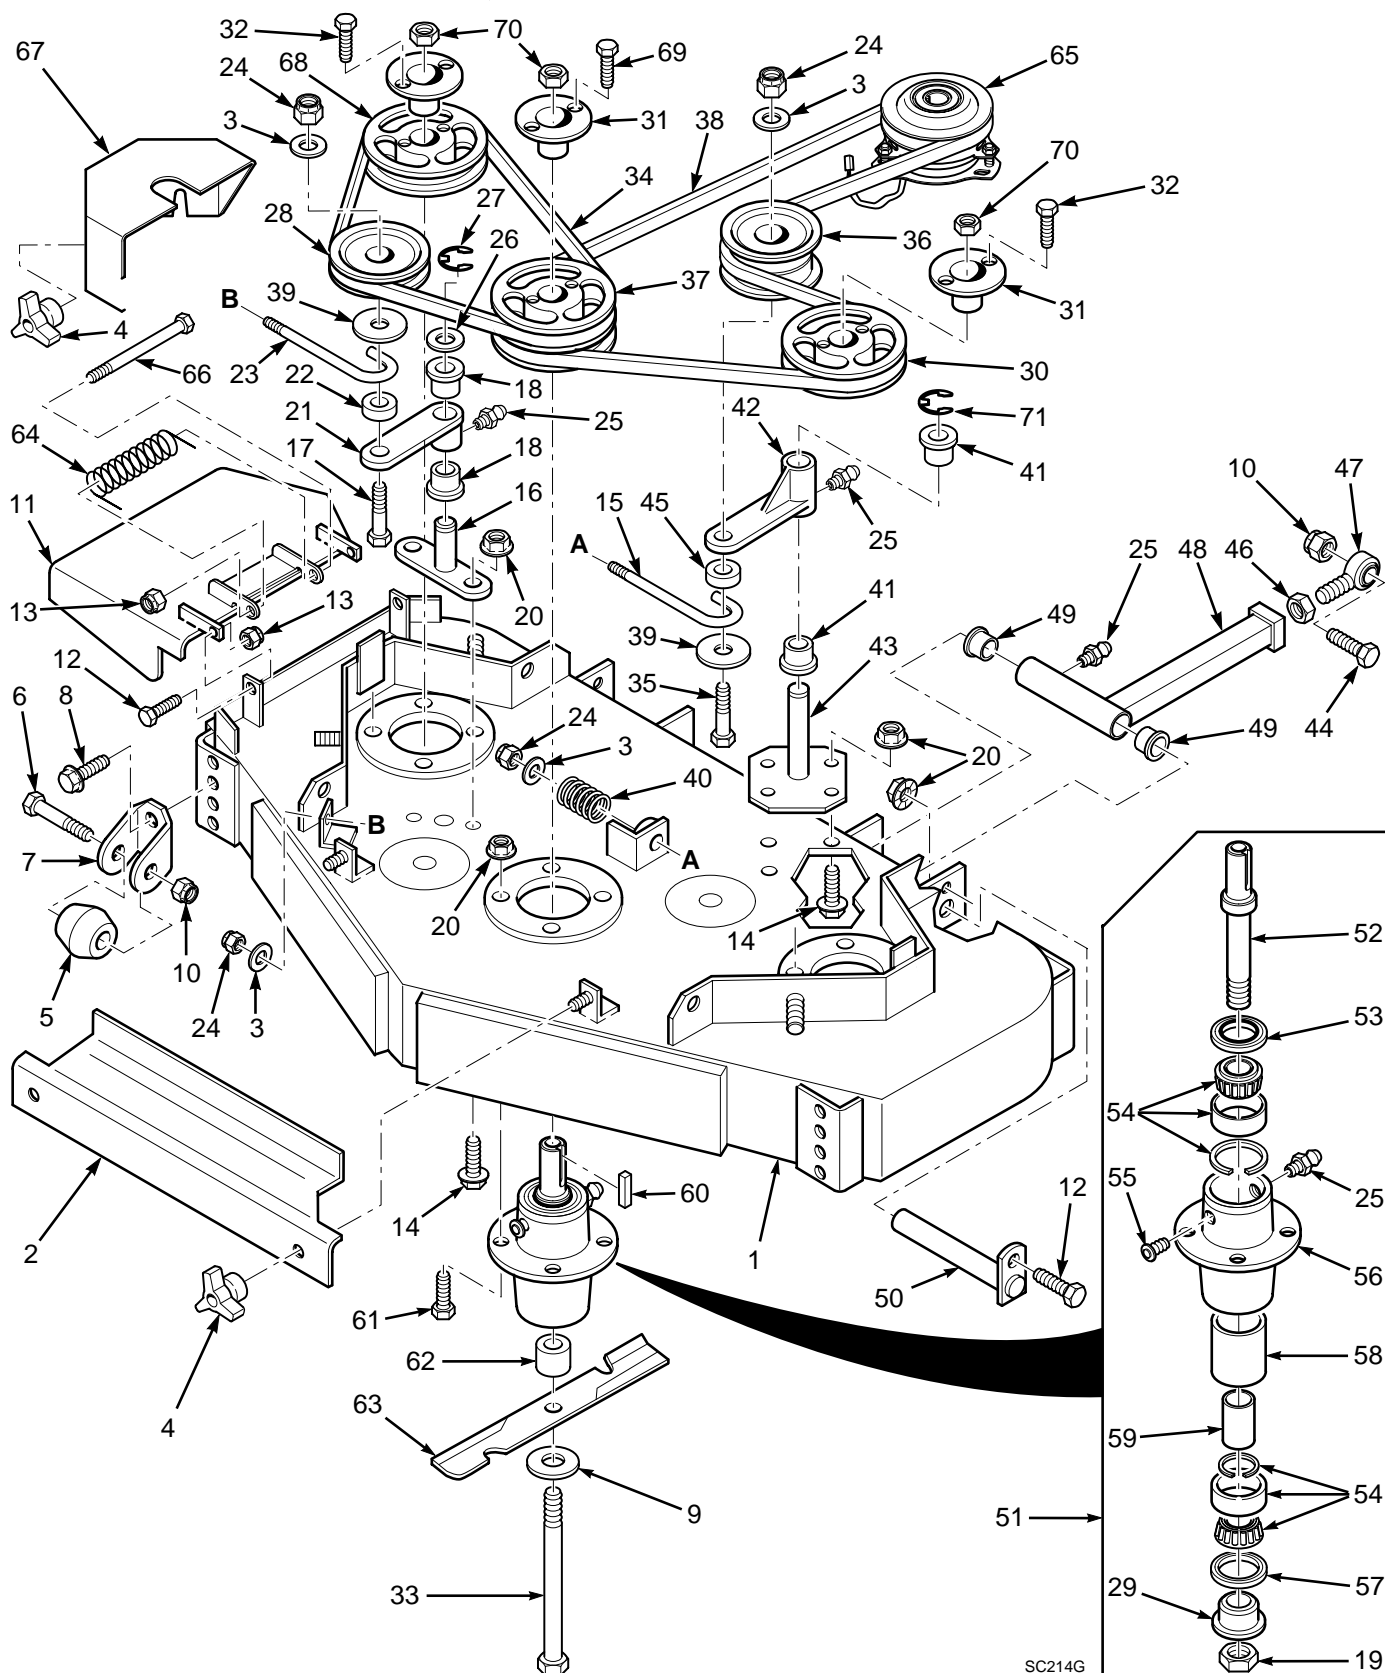


SC214G

48", 52", & 61" CUTTER DECKS - CONT'D

Ref. Part				Ref. Part			
No.	Number	Description	48 52 61	No.	Number	Description	48 52 61
1	46852	Cutter Deck (Includes decals)	X	39	04041-12	Flatwasher, 3/8" (.375 x 1.5 x .06)	X X X
	46615	Cutter Deck (Includes decals)	X	40	48807	Spring, Idler Tension	X X X
	46611	Cutter Deck (Includes decals)	X	41	48100-02	Bushing	X X X
2	421058	Belt Cover, Front	X	42	46750	Idler Arm (Includes bushings & grease fittings)	X X
	421451	Belt Cover, Front	X	43	45329	Idler Pivot Base	X X X
	421299	Belt Cover, Front	X	44	04001-97	Bolt, Hex Head 5/8-11 x 3"	X X X
3	04041-07	Flatwasher, 3/8" Special (.391 x .938 x .105)	X X X	45	43282	Spacer	X X
4	04029-03	Wing Nut, 3/8-16	X X X	46	04020-16	Nut, Hex 5/8-18 UNF	X X X
5	48584	Anti-Scalp Wheel	X X X	47	48763	Rod End	X X X
6	04001-79	Bolt, Hex Head 5/8-11 x 4-1/2"	X X X	48	46460	Push Arm (Includes 25, 46, 47, and 49)	X X X
7	42882	Anti-Scalp Wheel Bracket	X X X	49	48100-06	Bushing	X X X
8	04017-27	Bolt, Hex Serrated Flange 3/8-16 x 1"	X X X	50	45332	Push Arm Shaft	X X X
9	04040-10	Flatwasher, 5/8" (.688 x 1.75 x .134)	X X X	51	46631	Spindle Assembly	X X X
10	04021-13	Nut, Hex Elastic Stop 5/8-11	X X X	52	43298	Spindle Shaft	X X X
11	46727	Discharge Chute	X X				
	46728	Discharge Chute	X	53	481024	Seal, Top	X X X
12	04001-09	Bolt, Hex Head 5/16-18 x 1"	X X X	54	481022	Bearing Assembly (1 required per spindle)	X X X
13	04021-10	Nut, Hex Elastic Stop 5/16-18	X X X	55	48667	Relief Fitting, Tapered Spindle	X X X
14	04017-16	Bolt, Hex Serrated Flange 5/16-18 x 3/4"	X X X	56	43294	Spindle Housing	X X X
15	44078	"J" Rod	X	57	481025	Seal, Bottom	X X X
	44101	"J" Rod	X X	58	43312	Spacer, Outside	X X X
16	45037	Idler Pivot Base	X X X	59	43296	Spacer, Inside	X X X
17	04001-46	Bolt, Hex Head 3/8-16 x 2-1/4"	X X X	60	04063-08	Key, 1/4 x 1/4 x 2"	X X X
18	48100-05	Bushing	X X X	61	04001-10	Bolt, Hex Head 5/16-18 x 1-1/4"	X X X
19	481035	Nut, Special 1-1/16-18	X X X	62	43279	Spacer, Tapered Spindle	X X X
20	04019-03	Nut, Hex Serrated Flange 5/16-18	X X X	63	48110	Cutter Blade, 16-1/2" Standard	X
21	46081	Idler Arm (Includes bushings & grease fittings)	X X X		48184	Cutter Blade, 16-1/2" High Lift	X
22	43077	Spacer	X X X		48108	Cutter Blade, 18" Standard	X
23	43028	"J" Rod	X X		48185	Cutter Blade, 18" High Lift	X
	44078	"J" Rod	X		48111	Cutter Blade, 21" Standard	X
24	04021-09	Nut, Hex Elastic Stop 3/8-16	X X X		48304	Cutter Blade, 21" High Lift	X
25	48114-04	Grease Fitting	X X X	64	481050	Spring, Discharge Chute	X X X
26	04041-08	Flatwasher, 3/4"	X X X	65	48786	Electric Clutch	X X X
	04041-08S	Flatwasher, 3/4" Special	X X X	66	04001-108	Bolt, Hex Head 5/16-18 x 4.25"	X X X
27	04050-02	Ring, Retaining 3/4" External "E"	X X X	67	421616	Belt Cover, LH	X
28	48181	Pulley, Idler	X X X		421615	Belt Cover, RH	X
29	43297	Spindle Bushing, Bottom	X X X		42889	Belt Cover, LH	X
30	48924	Pulley, LH Spindle	X X		42890	Belt Cover, RH	X
	48753	Pulley, LH Spindle	X		421292	Belt Cover, LH	X
31	48926	Tapered Hub, 1-1/8 Bore	X X X		421293	Belt Cover, RH	X
32	04001-01	Bolt, Hex Head 1/4-20 x 3/4"	X X X	68	48924	Pulley, RH Spindle	X X X
33	04001-41	Bolt, Hex Head 5/8-11 x 9-1/2"	X X X	69	04001-109	Bolt, Hex Head 1/4-20 x 1.375 Full Thread	X X X
34	48087	Belt, RH Blade Drive	X	70	*	Nut, Hex 5/8-11 UNC	X X X
	48285	Belt, RH Blade Drive	X	71	04050-05	Ring, Retaining 1-1/8" External "E"	X X X
	48265	Belt, RH Blade Drive	X	72	46963	Idler Arm (Includes bushings & grease fittings)	X
35	04001-23	Bolt, Hex Head 3/8-16 x 4-1/2"	X X X				
36	48550	Pulley, Idler Cutter Engagement	X X X	73	04001-51	Bolt, Hex Head 3/8-16 X 3 3/4"	X
37	48923	Pulley, Double Groove	X X	74	04030-04	Lockwasher 3/8	X
	48940	Pulley, Double Groove	X	75	43369	Nut, 3/8-16 Special W/Washer	X
38	48799	Belt, Blade Drive	X				
	481001	Belt, Blade Drive	X				
	48996	Belt, Blade Drive	X				

* Common hardware which should be purchased locally. All bolts Grade 5 plated, all other fasteners zinc plated.

CUTTER DECK CONTROLS 48", 52", & 61" DECKS

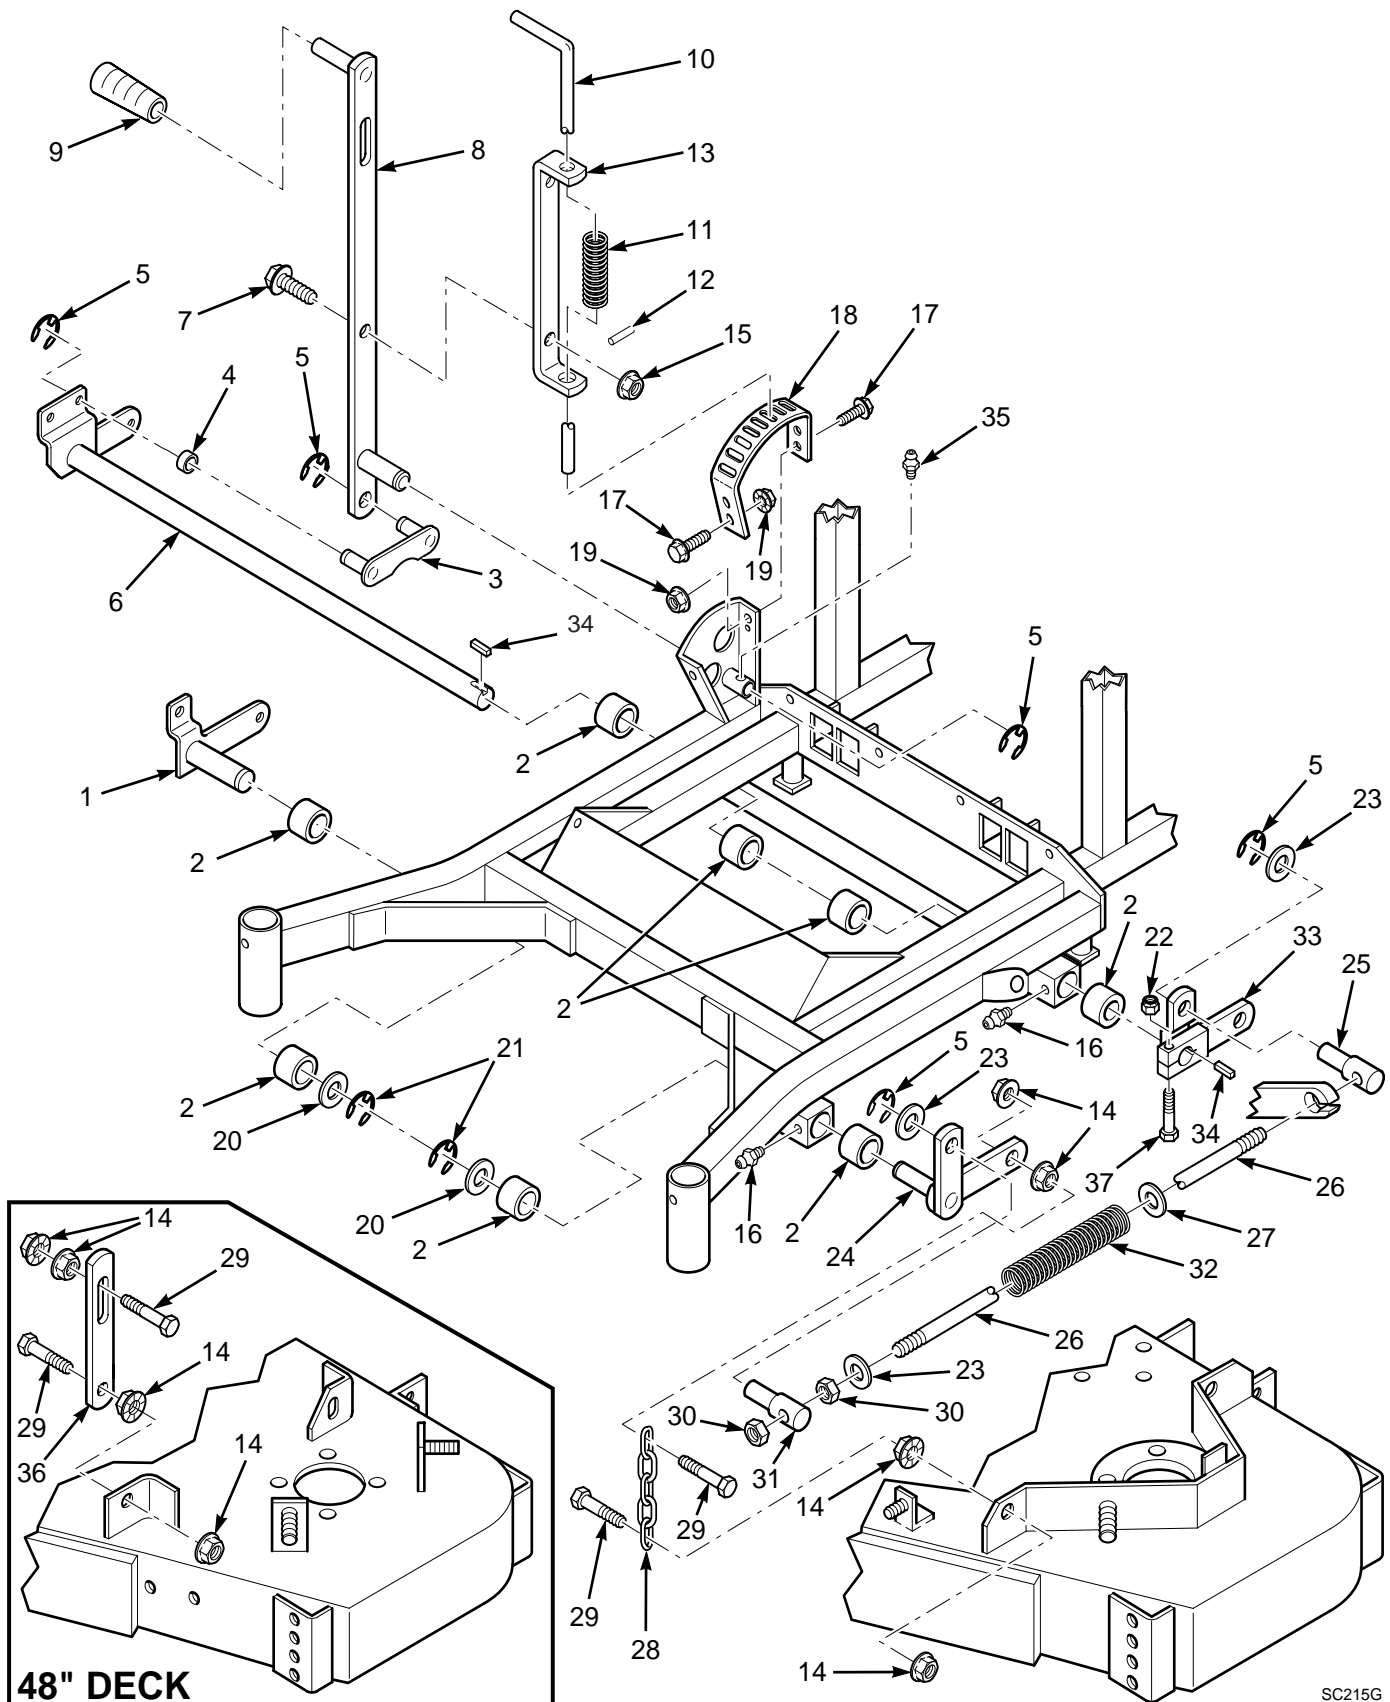


SC215G

CUTTER DECK CONTROLS 48", 52", & 61" DECKS - CONT'D

Ref. No.	Part Number	Description	48	52	61
1	45524	Bellcrank, Lift - Right Front	X	X	X
2	48100-05	Bushing	X	X	X
3	45527	Lift Link	X	X	X
4	43180	Bushing		X	X
5	04050-01	Retaining Ring, 5/8" External "E"		X	X
6	45610	Lift Arm Weldment	X		
	45523	Lift Arm Weldment		X	X
7	04017-17	Bolt, Serrated Flange Hex Head 5/16-18 x 1"	X	X	X
8	46384	Height Adjustment Lever (Includes grip)	X	X	X
9	48093	Grip, Lever Lift	X	X	X
10	44065	Rod, Cutter Deck Lock	X	X	X
11	48053	Spring, Deck Lift Index	X	X	X
12	04060-01	Roll Pin, 5/32 x 3/4"		X	X
13	42887	Lock, Rod Guide	X	X	X
14	04019-04	Nut, Serrated Flange Hex 3/8-16	X	X	X
15	04019-03	Nut, Serrated Flange Hex 5/16-18		X	X
16	48114-04	Grease Fitting	X	X	X
17	04017-05	Bolt, Serrated Flange Hex Head 1/4-20 x 3/4"		X	X
18	42828	Strip, Height Adjustment	X	X	X
19	04019-02	Nut, Serrated Flange Hex 1/4-20		X	X
20	04041-08S	Flatwasher, 3/4" (.766 x 1.250 x .075)		X	X
21	04050-02	Ring, Retaining 3/4" External "E"		X	X
22	04021-09	Nut, Elastic Stop 3/8-16	X	X	X
23	04040-09	Flatwasher, 5/8" (.656 x 1.312 x .075)	X	X	X
24	45313	Bellcrank, Lift - Left Front	X	X	X
25	43271	Swivel Joint - LH THD	X	X	X
26	04004-18	Adjustment Stud	X		
	04004-15	Adjustment Stud		X	X
27	04040-10	Flatwasher, 5/8" (.688 x 1.75 x .134)	X	X	X
28	48540	Chain		X	X
29	04001-20	Bolt, Hex Head 3/8-16 x 1-1/2"	X	X	X
30	04020-09	Nut, Hex 5/8-11	X	X	X
31	43270	Swivel Joint - RH	X	X	X
32	481045	Spring, Deck Lift	X		
32	48953	Spring, Deck Lift		X	X
33	45427	Bellcrank	X	X	X
34	04063-15	Key, 3/16 x 3/16 x .75"	X	X	X
35	48114-05	Grease Fitting		X	X
36	421585	Link, Deck Support	X		
37	04001-45	Bolt, Hex Head 3/8-16 x 2"	X	X	X

* Common hardware which should be purchased locally. All bolts Grade 5 plated, all other fasteners zinc plated.

SHEET METAL COMPONENTS

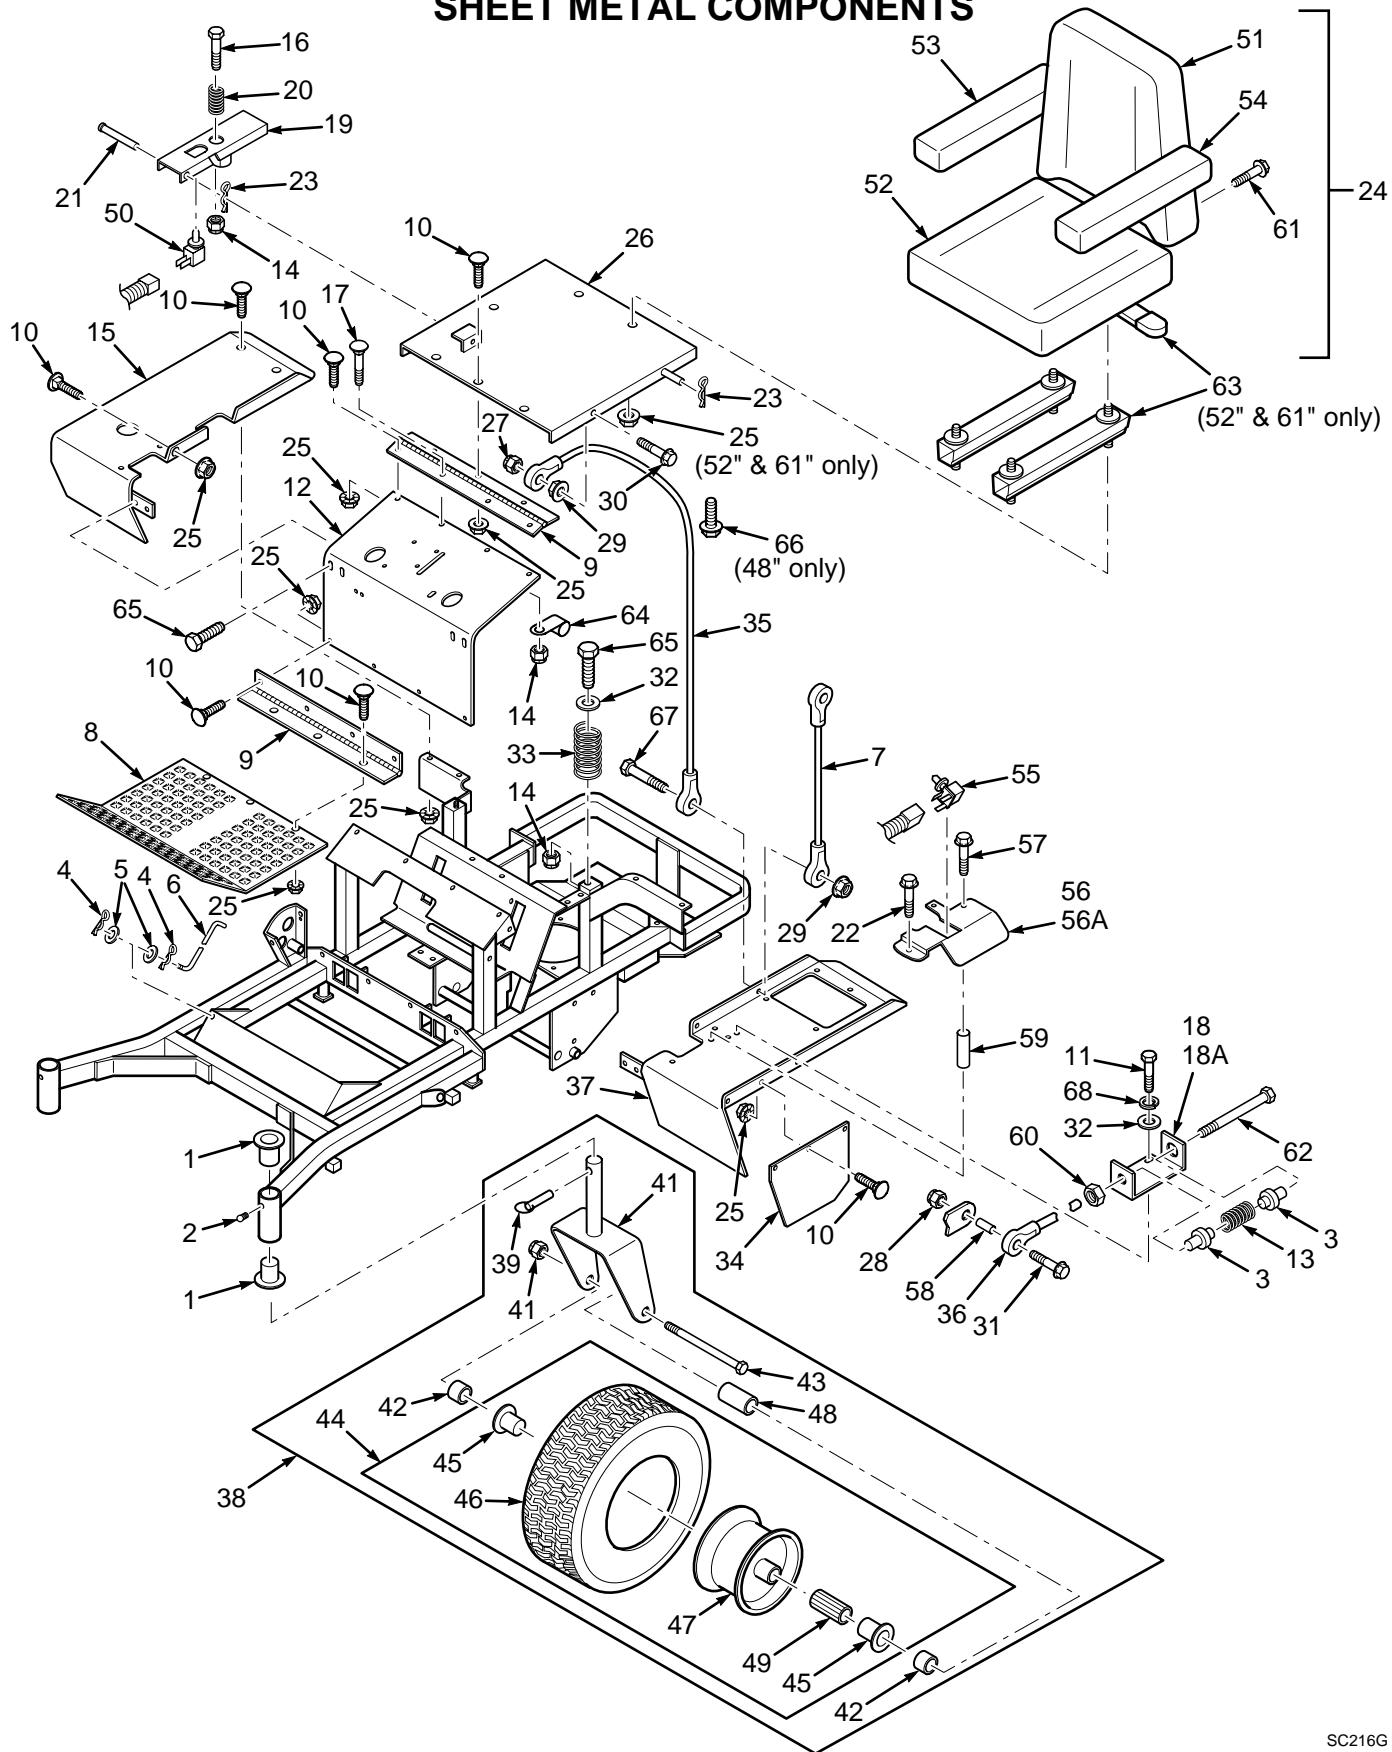


SHEET METAL COMPONENTS - CONT'D

Ref. Part				Ref. Part			
No.	Number	Description	48 52 61	No.	Number	Description	48 52 61
1	48100-08	Bushing	X X X	35	48566	Cable, Seat Stop	X X X
2	48114-04	Grease Fitting	X X X	36	48464	Ball Joint, Neutral	X X X
3	43257	Bushing, Spring Keeper	X X X	37	45479	Fender, LH	X X X
4	04062-02	Hair Pin, .08 Diameter x 1-3/16"	X X X	38	46392	Caster Wheel Yoke Assembly	X X X
5	04041-07	Flatwasher, 3/8" (.391 x .738 x .105)	X X X	39	04066-01	Quick Pin	X X X
6	44062	Rod, Foot Plate Latch	X X X	40	45325	Caster Wheel Yoke	X X X
7	481086	Cable, Seat Stop	X X X	41	04021-07	Nut, Elastic Stop 1/2-13	X X X
8	421589	Foot Plate	X	42	43041	Spacer	X X X
	42764	Foot Plate	X X	43	04001-80	Bolt, Hex Head 1/2-13 x 6-1/2"	X X X
9	481049	Hinge	X X X	44	48537	Wheel Assembly, Complete	X X X
10	04003-12	Bolt, Carriage 5/16-18 x 3/4"	X X X	45	48006-07	Retainer	X X X
11	04001-08	Bolt, Serrated Flange Hex Head 5/16-18 x 3/4"	X X X	46	48537-02	Tire Only	X X X
12	421251	Kick Plate	X X X	47	48537-03	Rim Only	X X X
13	48746	Neutral Return Spring	X X X	48	43022	Sleeve	X X X
14	04021-10	Nut, Elastic Stop 5/16-18	X X X	49	48006-06	Roller Bearing	X X X
15	46505	Fender Assembly, RH (with decal)	X X X	50	48717	Seat Switch	X X X
16	04001-73	Bolt, Hex Head 5/16-18 x 3-3/4"	X X X	51	48704-02	Seat, Back Cushion	X X X
17	04003-04	Bolt, Carriage 5/16-18 x 1"	X X X	52	48704-03	Seat, Bottom Cushion	X X X
18	421411	Retainer, Neutral Spring, LH	X X X	53	48704-04	Arm Pad, RH	X X X
18A	421412	Retainer, Neutral Spring, RH	X X X	54	48704-05	Arm Pad, LH	X X X
19	45405	Seat Switch Bracket	X X X	55	48522	Neutral Interlock Switch	X X X
20	48463	Spring	X X X	56	421253	Neutral Lock Bracket, RH	X X X
21	04064-04	Clevis Pin	X X X	56A	421252	Neutral Lock Bracket, LH	X X X
22	04017-15	Bolt, Serrated Flange Hex Head 5/16-18 x 1/2"	X X X	57	04017-24	Bolt, Serrated Flange Hex Head 5/16-18 x 2-3/4"	X X X
23	04062-02	Hair Pin, Cotter	X X X	58	43240	Spacer, Neutral Spring	X X X
24	48831	Seat Assembly	X	59	43258	Spacer, Neutral Lock Bracket	X X X
	48930	Seat Assembly w/Adjuster Rails	X X	60	04020-14	Nut, Hex 3/8-24 UNF	X X X
25	04019-03	Nut, Serrated Flange Hex 5/16-18	X X X	61	48704-06	Bolt, Hex Head w/Washer, 1/4-20 x 3/4"	X X X
26	46754	Seat Base	X X X	62	04001-99	Bolt, Hex Head 3/8-24 x 6-1/2", UNF	X X X
27	04021-08	Nut, Elastic Stop 1/4-20	X X X	63	48931	Seat Adjustment, Track Set	X X X
28	04021-09	Nut, Elastic Stop 3/8-16	X X X	64	48030-09	Cable Clamp, .50 ID	X X X
29	04019-02	Nut, Serrated Flange Hex 1/4-20	X X X	65	04001-09	Bolt, Hex Head 5/16-18 x 1"	X X X
30	04017-06	Bolt, Serrated Flange Hex Head 1/4-20 x 1"	X X X	66	04017-16	Bolt, Serrated Flange Hex Head 5/16-18 x 1"	X
31	04001-31	Bolt, Hex Head 3/8-16 x 2-1/2"	X X X	67	*	Bolt, Hex Head 1/4-20 x 1.25"	X X X
32	04001-15	Flatwasher, 5/16" (.313 x .875 x .083)	X X X	68	*	Lockwasher, 5/16"	X X X
33	48686	Seat Spring	X X X	69A	46823	Main Frame Assy.	X
34	421198	Fender Panel, LH	X X X	69B	46824	Main Frame Assy.	X X

* Common hardware which should be purchased locally. All bolts Grade 5 plated, all other fasteners zinc plated.

HYDRAULIC COMPONENTS

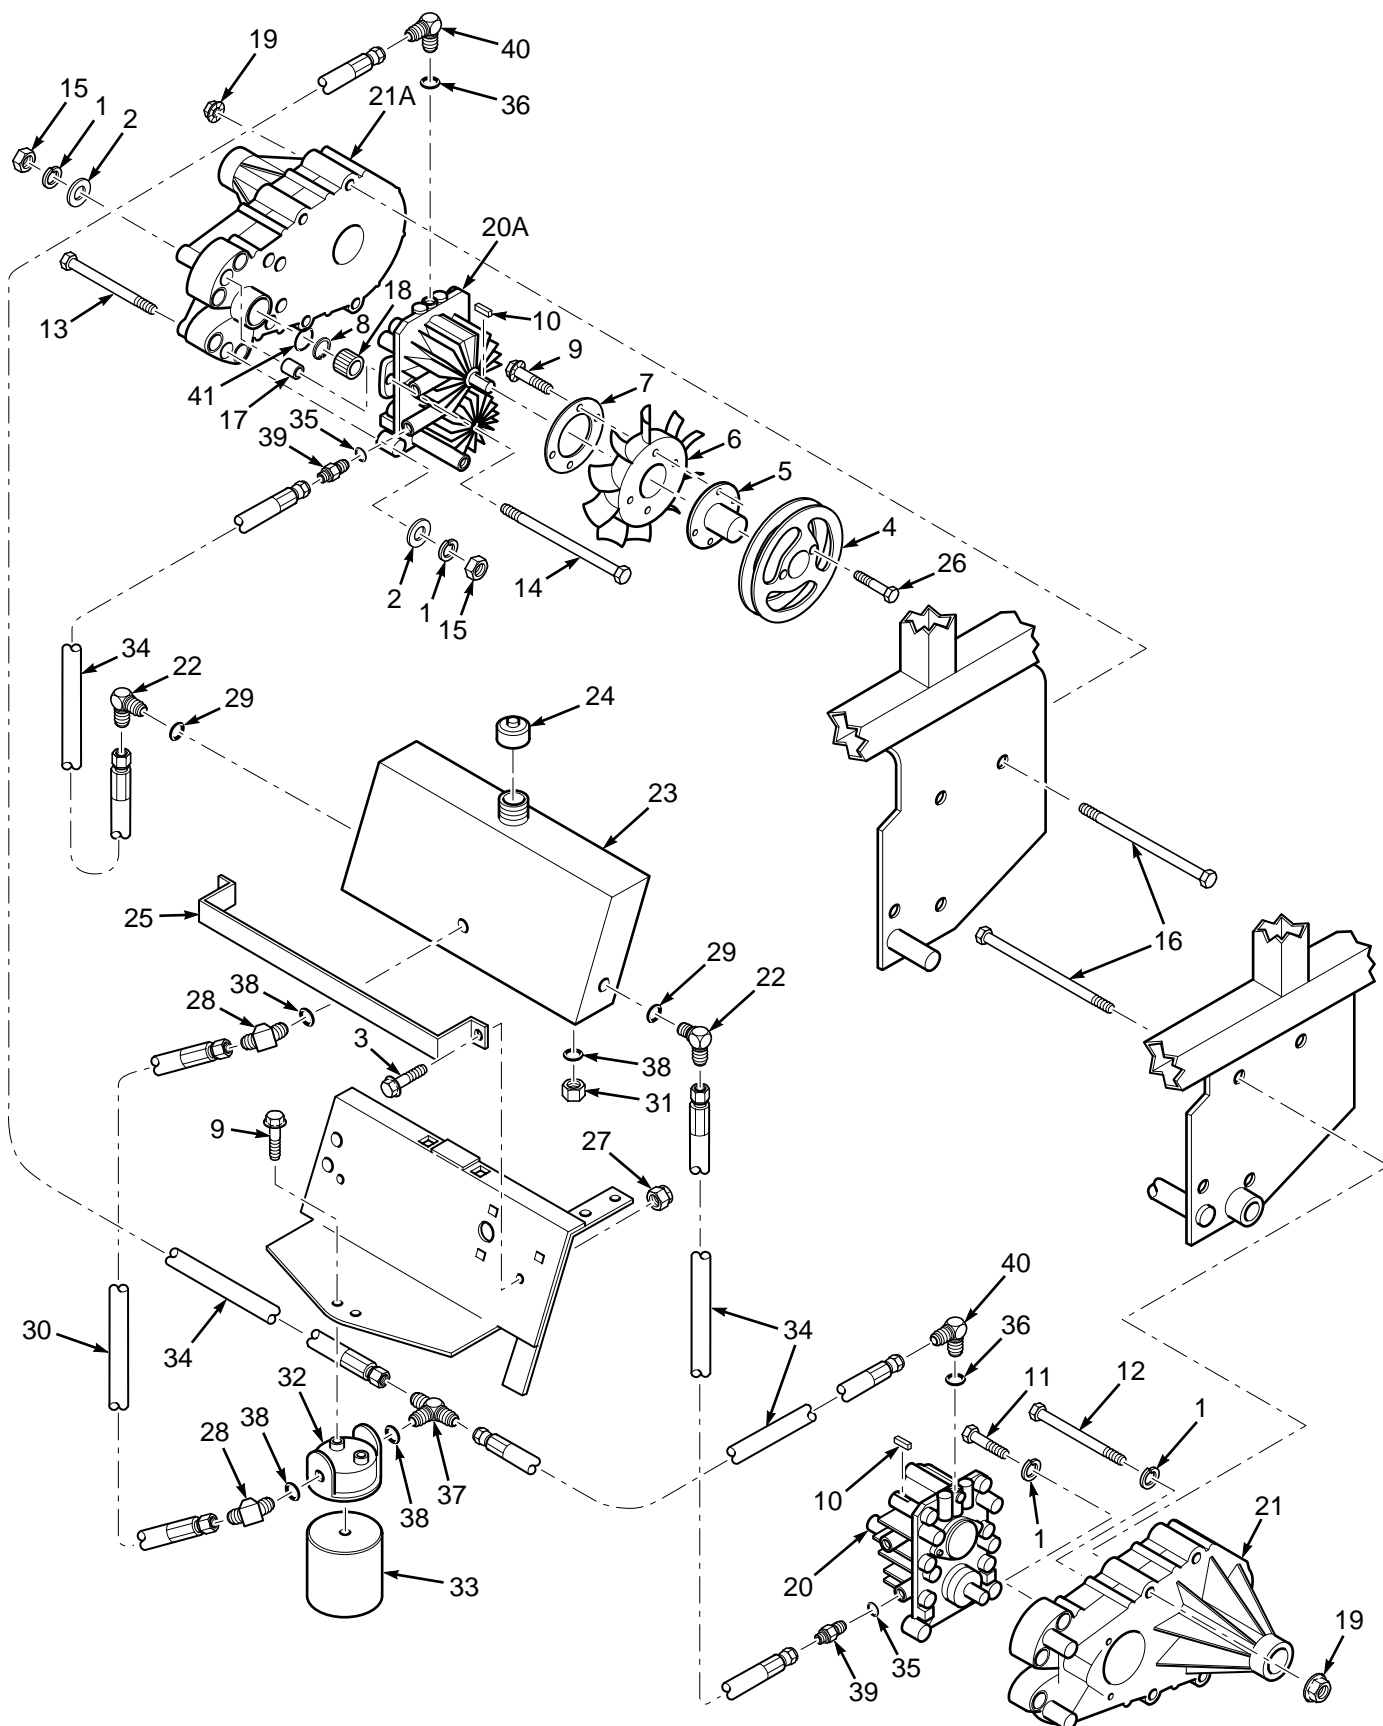


HYDRAULIC COMPONENTS - CONT'D

Ref. Part No. Number Description			48	52	61
1	04030-03	Lockwasher, 5/16"	X	X	X
2	04040-04	Flatwasher, 5/16" (.344 x .688 x .065)	X	X	X
3	04017-05	Bolt, Serrated Flange Hex Head 1/4-20 x 3/4"	X	X	X
4	48790	Pump, Pulley	X	X	X
5	48791	Tapered Hub, 15 mm Bore	X	X	X
6	48789	Fan	X	X	X
7	421209	Washer, Back-up	X	X	X
8	04050-13	Snap Ring	X	X	X
9	04017-04	Bolt, Serrated Flange Hex Head 1/4-20 x 1/2"	X	X	X
10	04063-14	Key, 5 mm x 5 mm x 25 mm	X	X	X
11	04001-12	Bolt, Hex Head 5/16-18 x 1-3/4"	X	X	X
12	04001-96	Bolt, Hex Head 5/16-18 x 4-1/2"	X	X	X
13	04001-95	Bolt, Hex Head 5/16-18 x 5"	X	X	X
14	04001-94	Bolt, Hex Head 5/16-18 x 7-1/2"	X	X	X
15	04020-03	Nut, Hex 5/16-18	X	X	X
16	04001-30	Bolt, Hex Head 3/8-16 x 4"	X	X	X
17	48878	Spacer	X	X	X
18	48875	Gear	X	X	X
19	04019-04	Nut, Serrated Flange Hex Head 3/8-16	X	X	X
20	48784	Pump, LH (Includes spacers)	X	X	X
20A	48785	Pump, RH (Includes spacers)	X	X	X
21	481097	Axle, LH (Includes brake lever)	X	X	X
21A	481224	Axle, RH (Includes brake lever)	X	X	X
22	48350-09	Elbow, 90 Degree 9/16-18 JIC to 9/16-18 "O" Ring	X	X	X
23	48860	Oil Tank Reservoir	X	X	X
24	48894	Cap, Oil Reservoir	X	X	X
25	421208	Strap, Oil Reservoir	X	X	X
26	04001-59	Bolt, Hex Head 1/4-20 x 1-1/4"	X	X	X
27	04021-08	Nut, Elastic Stop 1/4-20	X	X	X
28	48485-01	Elbow, 45 Degree 3/4-16 JIC to 3/4-16 "O" Ring	X	X	X
29	48603-06	"O" Ring, 5/64 x 15/32 ID	X	X	X
30	48872	Hose Assembly, Filter Inlet	X	X	X
31	48604-02	Plug, 3/4-16 "O" Ring	X	X	X
32	48462-02	Head, Oil Filter	X	X	X
33	48462-01	Oil Filter, Special	X	X	X
34	48871	Hose Assembly	X	X	X
35	48603-04	"O" Ring, 3/32 x 3/4 ID	X	X	X
36	48603-03	"O" Ring, 1/16 x 3/8 ID	X	X	X
37	48810-01	1/2" T-fitting, 3/4-16 JIC to 3/4-16 "O" Ring	X	X	X
38	48603-02	"O" Ring, 3/32 x 5/8 ID	X	X	X
39	48572-02	Tube Union 3/4-16 JIC to 7/8-14 "O" Ring	X	X	X
40	48350-10	Elbow, 90 Degree 9/16-18 JIC to 7/16-20 "O" Ring	X	X	X
41	HG50267	"O" Ring	X	X	X
42	481090	Gasket, Hydraulic Tank Cap	X	X	X
43	481507	Filler Neck Insert	X	X	X

* Common hardware which should be purchased locally. All bolts Grade 5 plated, all other fasteners zinc plated.


BDU-10L HYDRAULIC PUMP

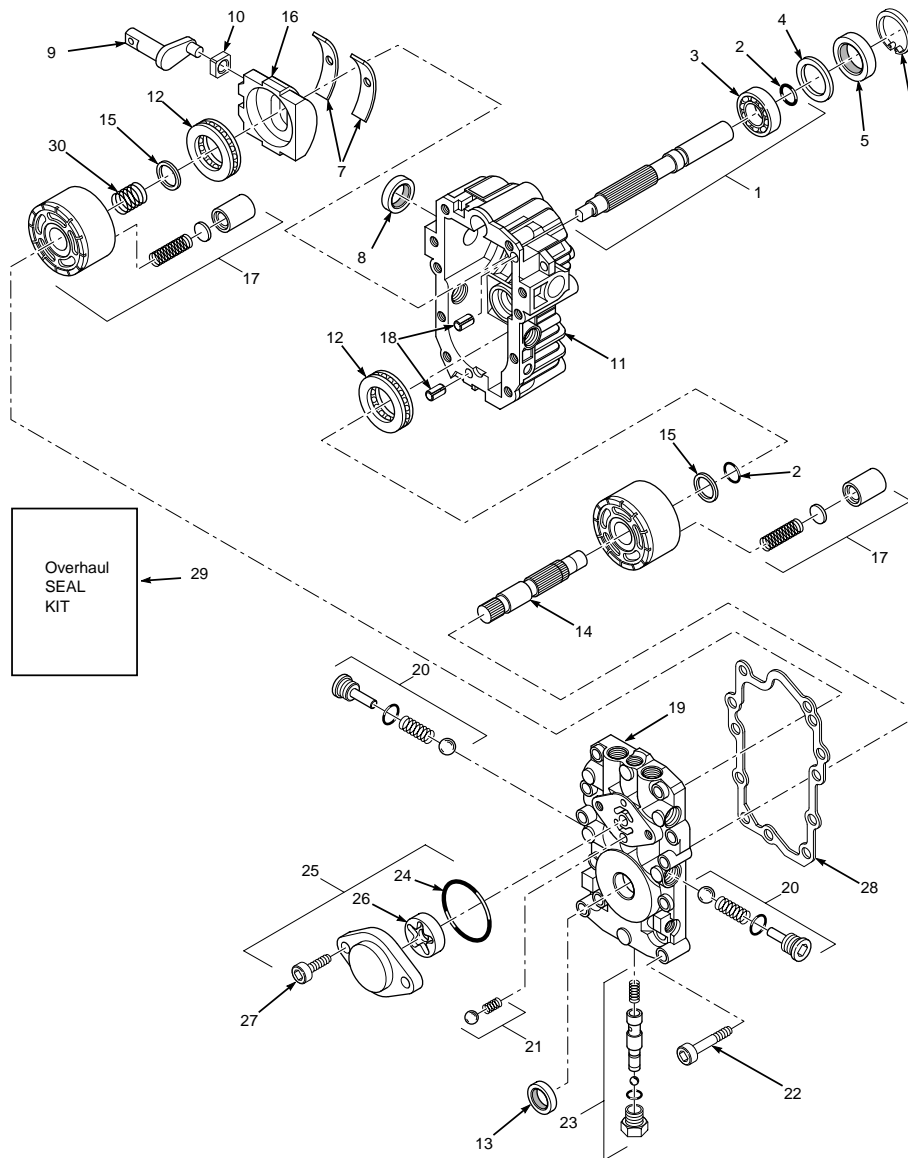

SC226G

Ref. No.	Part Number	Description	Ref. No.	Part Number	Description
1	HG2513038	Pump Shaft Kit	16	HG2003087	Variable Swash Plate
2	HG2003016	Wire Retaining Ring	17	HG70079	BDP-10L Block Assembly
3	HG2003043	Ball Bearing	18	HG9004800-2506	Pin ST Holder
4	HG2003018	Spacer	19	HG2513006	Center Section Kit
5	HG9008000-0128	Lip Seal (16 x 35 x 7)	20	HG2510027	Check Valve Kit
6	HG2003052	Retaining Ring	21	HG2510011	Charge Relief Kit
7	HG2003023	Cradle Bearing	22	HG9007314-0808	Socket Head Cap Screw
8	HG9008000-126	Lip Seal (12 x 35 x 7)	23	HG2513011	Bypass Valve Kit
9	HG2003005	Trunnion Arm	24	HG9004101-1340	O-Ring
10	HG2000015	Slot Guide	25	HG2513027	Charge Pump Cover
11	HG2513020	Transmission Housing Kit RH	26	HG50273	Gerotor Assembly
	HG2513003	Transmission Housing Kit LH	27	HG50095	Capscrew (6mm x 20")
12	HG2003044	Thrust Ball Bearing Assembly	28	HG2003060	Center Section Gasket
13	HG9008000-0127	Lip Seal (15 x 24 x 7)	29	HG2513013	Overhaul Seal Kit
14	HG2003032	Motor Shaft	30	HG2000025	Spring Block
15	HG2003017	Block Thrust Washer			


AXLE ASSEMBLY

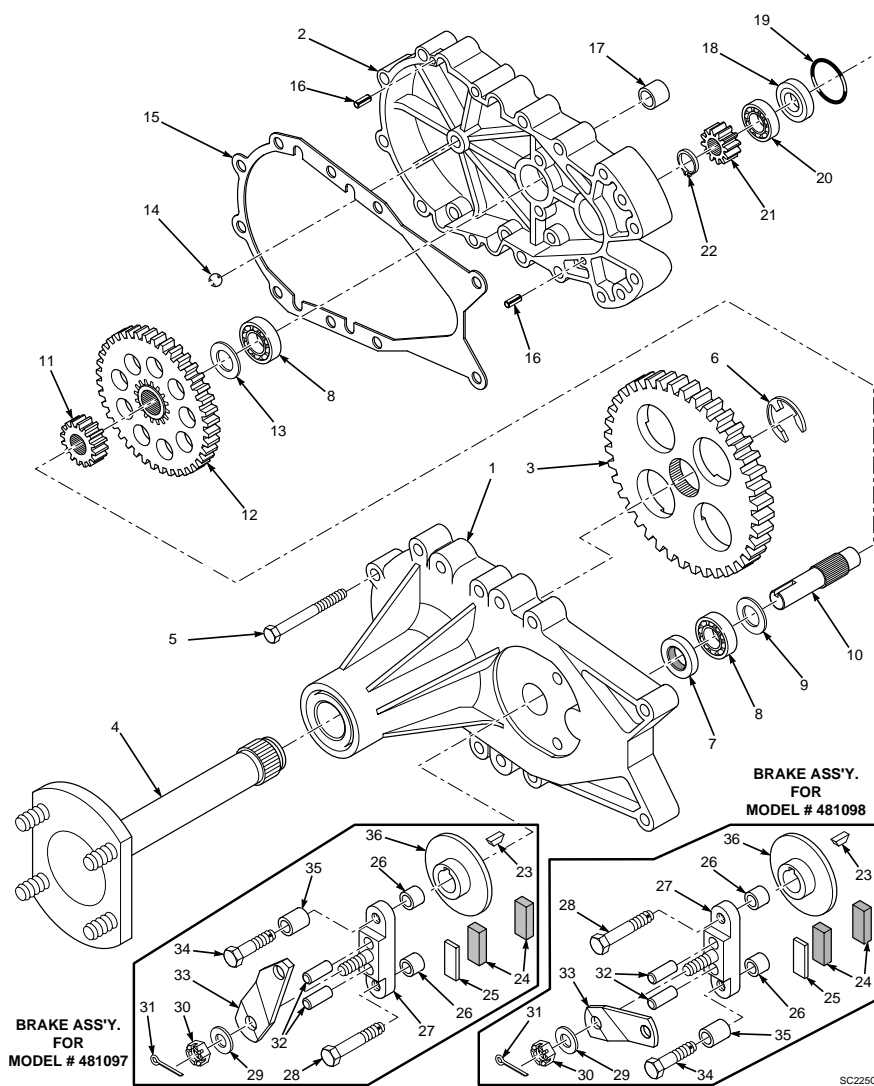

SC225G

Ref. Part No. Number	Description	Ref. Part No. Number	Description
1	HG62768 Axle Housing Assembly	20	HG44232 Ball Bearing, 15mm x 35mm x 11mm
2	HG44533 Hydro Mount Housing	21	HG44353 Input Gear, 11 Tooth
3	HG44358 Splined 72 Tooth Final Drive Gear	22	HG44354 Retaining Ring
4	HG62681 Axle Shaft Assembly	23	HG44143 Key, Hi Pro 3/16 x 5/8
5	HG44366 Bolt, 1/4-20 x 2-1/2" Hex Head	24	HG44132 Puck, Brake
6	HG44359 E-Ring .875	25	HG44134 Plate, Puck
7	HG50263 Oil Seal, 1.25 x .625	26	HG23770 Brake Spacer
8	HG44147 Ball Bearing, .62 ID x 1.38 x .44	27	HG62589 Brake Yoke Assembly
9	HG44371 Washer, HT .62 ID x 1.0 OD x .05 Thick	28	HG44276 Bolt, 1/4-20 x 1-1/2" W/Patch
10	HG44351 Brake Shaft (Splined)	29	HG44130 Washer, 7/16 x 7/8 OD x .06 HT
11	HG50419 Splined Reduction Gear, 17 Tooth	30	HG44142 Nut, Castle 5/16-24 PL
12	HG50420 Splined 60 Tooth Gear	31	HG44101 Pin, Cotter
13	HG44371 Washer, HT .62 ID x 1.0 OD x .05 Thick	32	HG44127 Pin, Brake Actuating
14	HG9001214-3700 Ball, 3/8" Diameter	33	HG44094 Arm, Brake Actuator (LH Assy.)
15	HG50223 Gasket, Housing	33	HG44613 Arm, Brake Actuator (RH Assy.)
16	HG44269 Pin, Spring 3/16" x 1/2" x 12" Long	34	HG44612 Bolt, 1/4-20 x 2-1/2"
17	HG23747 Mounting Spacer	35	HG23711 Spacer, Torsion Spring
18	HG44355 Bearing, Spacer	36	HG44090 Disc, Brake
19	HG50267 O-Ring		

TRACTION DRIVE COMPONENTS

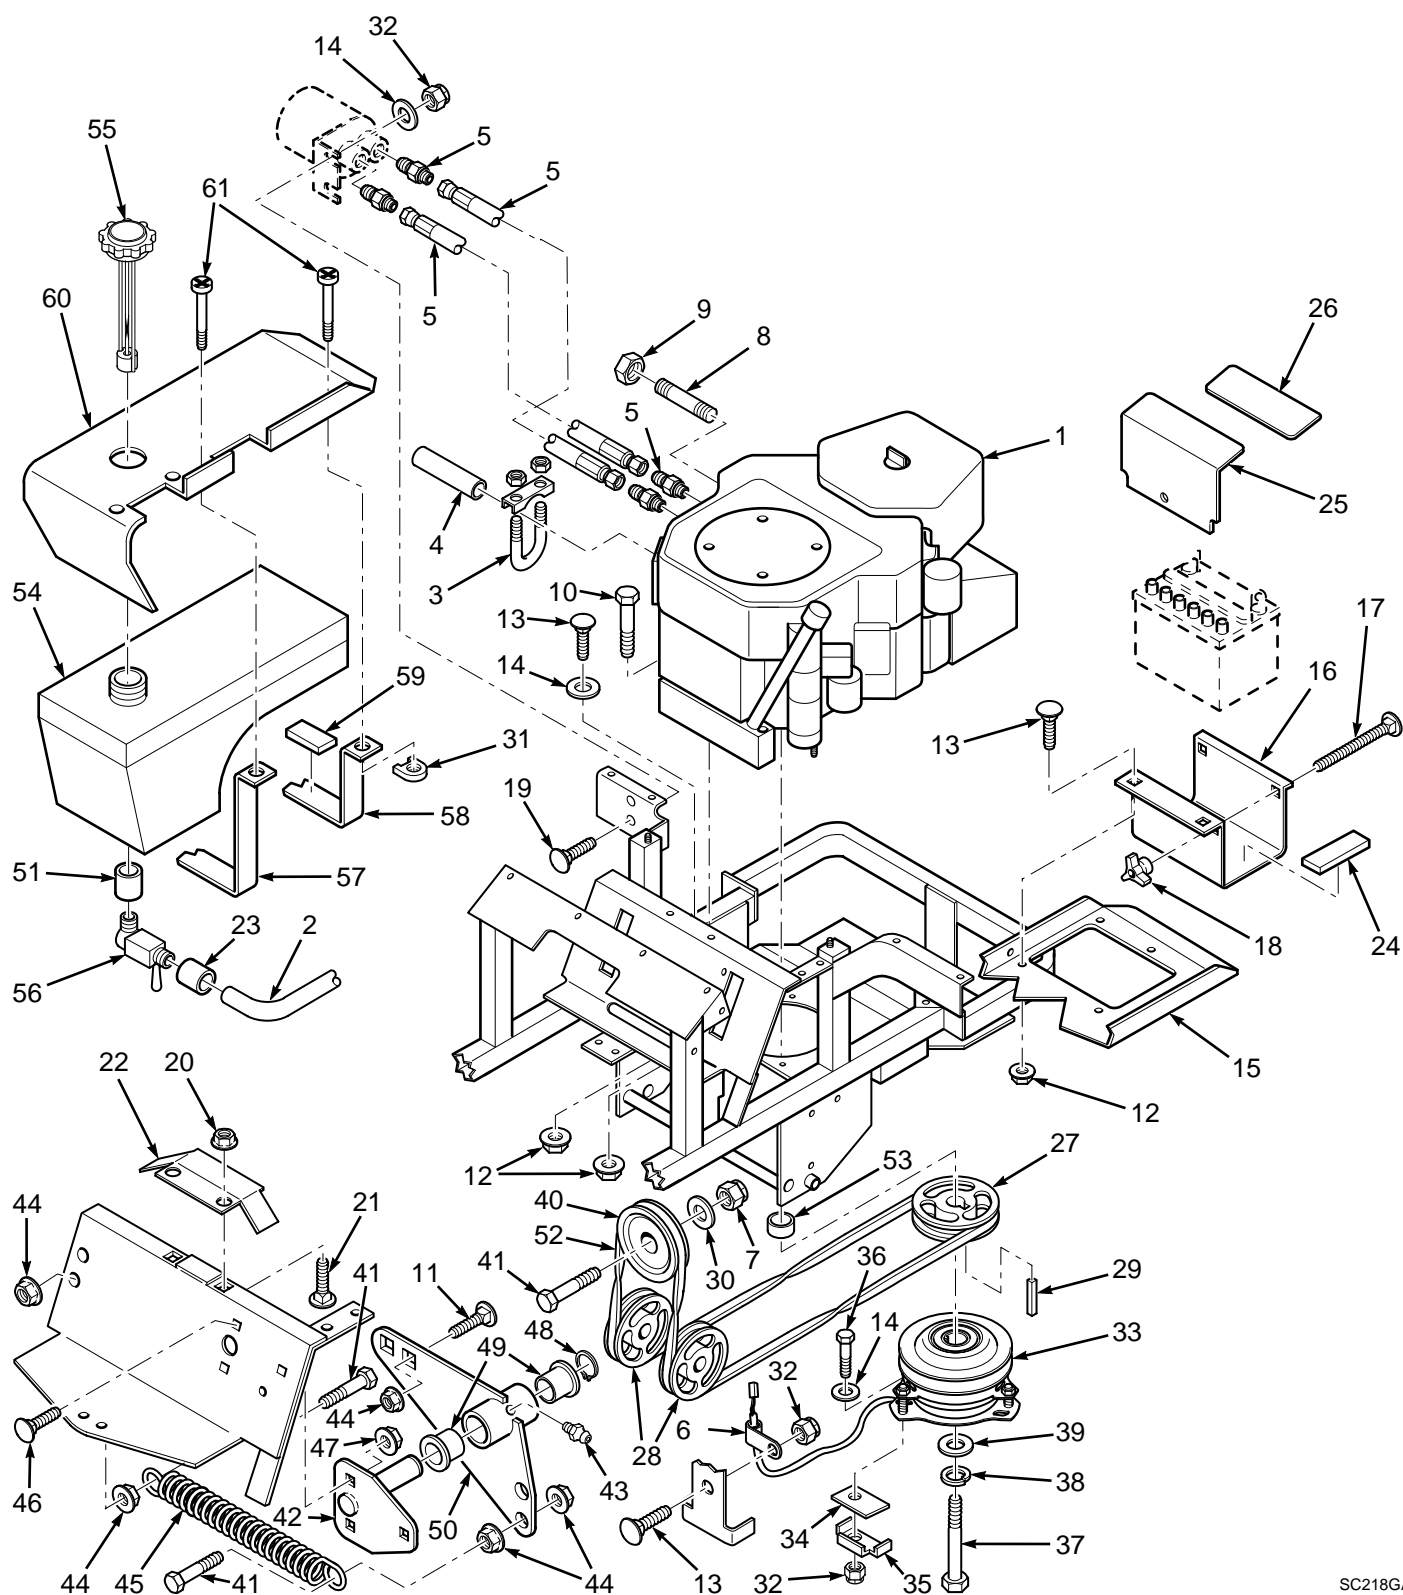


SC218GA

TRACTION DRIVE COMPONENTS

Ref. Part				Ref. Part			
No.	Number	Description	48 52 61	No.	Number	Description	48 52 61
1	481116	Engine 18 hp Kohler CV For SSZ-18CV	X	34	48814	Rubber Pad, Clutch Stop	X X X
	481117	Engine 20 hp Kohler CV For SSZ-20CV	X X X	35	421564	Backing Plate	X X X
	481118	Engine 22 hp Kohler CV For SSZ-22CV	X X X	36	04001-10	Bolt, Hex Head 5/16-18 x 1-1/4"	X X X
2	48058-03	Fuel Hose	X X X	37	04001-101	Bolt, Hex Head 7/16-20 x 2.50	X X X
3	48633	Muffler Clamp	X X X	38	04030-05	Lockwasher, 7/16"	X X X
4	48964	Tube, Exhaust	X X X	39	04041-18	Flatwasher, 7/16" Special	X X X
5	*	Kohler Fittings, Purchase From Kohler	X X X	40	48181	Idler, Pulley	X X X
6	48030-09	Clamp, 50 ID	X X X	41	04001-21	Bolt, Hex Head 3/8-16 x 1.75"	X X X
7	04021-09	Nut, 3/8-16 Elastic Stop	X X X	42	45650	Pivot Weldment, Idler Arm	X X X
8	48402-02	Extention, 3"	X X X	43	48114-04	Grease Fitting	X X X
9	48257	Pipe Cap	X X X	44	04019-04	Nut, Serrated Flange Hex 3/8-16	X X X
10	04017-19	Bolt, 5/16-18 x 1-1/2" Serr. Flng. Hex Head	X X X	45	48961	Spring, Pump Drive Idler	X X X
11	04003-05	Bolt, 7/8-16 x 1.50" Carriage	X X X	46	04003-12	Bolt, Carriage 5/16-18 x 3/4	X X X
12	04019-03	Nut, Serrated Flange Hex Head 5/16-18	X X X	47	04019-03	Nut, Serrated Flange Hex 5/16-18	X X X
13	04003-12	Bolt, Carriage 5/16-18 x 3/4"	X X X	48	04050-05	Ring, Retaining 1.125 Diameter External "E"	X X X
14	04040-15	Flatwasher, 5/16" (.313 x .875 x .083)	X X X	49	48100-02	Bushing, 1.125 Sintered	X X X
15	45479	Fender, LH	X X X	50	46755	Idler Arm Weldment, Pump Drive	X X X
16	421197	Battery Box	X X X	51	48309	Bushing, Fuel Tank Valve	X X X
17	04003-01	Bolt, Carriage 1/4-20 x 6"	X X X	52	48760	Belt, Pump Drive	X X X
18	04029-01	Wing Nut, 1/4-20	X X X	53	43248	Spacer, Crankshaft	X X X
19	04003-04	Bolt, Carriage 5/16-18 x 1"	X X X	54	48651	Fuel Tank (Includes shut-off valve)	X X X
20	04019-02	Nut, Serrated Flange Hex 1/4-20	X X X	55	48658	Fuel Tank Cap	X X X
21	04003-02	Bolt, Carriage 1/4-20 x 3/4"	X X X	56	48308	Fuel Shut-off Valve	X X X
22	421624	Belt Guard	X X X	57	42944	Fuel Tank Strap, Long	X X X
23	48059-01	Fuel Hose Clamp	X X X	58	42945	Fuel Tank Strap, Short	X X X
24	48661	Rubber Pad	X X X	59	48657	Rubber Pad	X X X
25	42392	Battery Cover	X X X	60	46505	Fender Assembly, RH (with decal)	X X X
26	48099	Pad, Battery Cover	X X X	61	04010-10	Screw, Machine 1/4-20 x 2" Phillips Head	X X X
27	48792	Pulley	X X X	62	04017-19	Bolt, 5/16-18 x 1-1/2" Serr.Flmg. Hex Head	X X X
28	48790	Pulley, Pump	X X X	63	04003-05	Bolt, Carriage 7/8-16 x 1.50"	X X X
29	04063-06	Key, 1/4 x 1/4 x 1-1/2"	X	64	04021-09	Nut, Elastic Stop 3/8-16	X X X
30	04041-07	Flatwasher, 3/8" (.391 x .938 x .105)	X X X	65	48030-09	Clamp, .50 ID	X X X
31	04110-01	U-Nut, 1/4-20	X X X	66	*	Kohler Fittings, Purchase From Kohler	X X X
32	04021-10	Nut, Elastic Stop 5/16-18	X X X				
33	48786	Electric Clutch	X X X				

* Kohler hardware which should be purchased from an authorised Kohler Dealer.


BRAKE AND STEERING CONTROLS

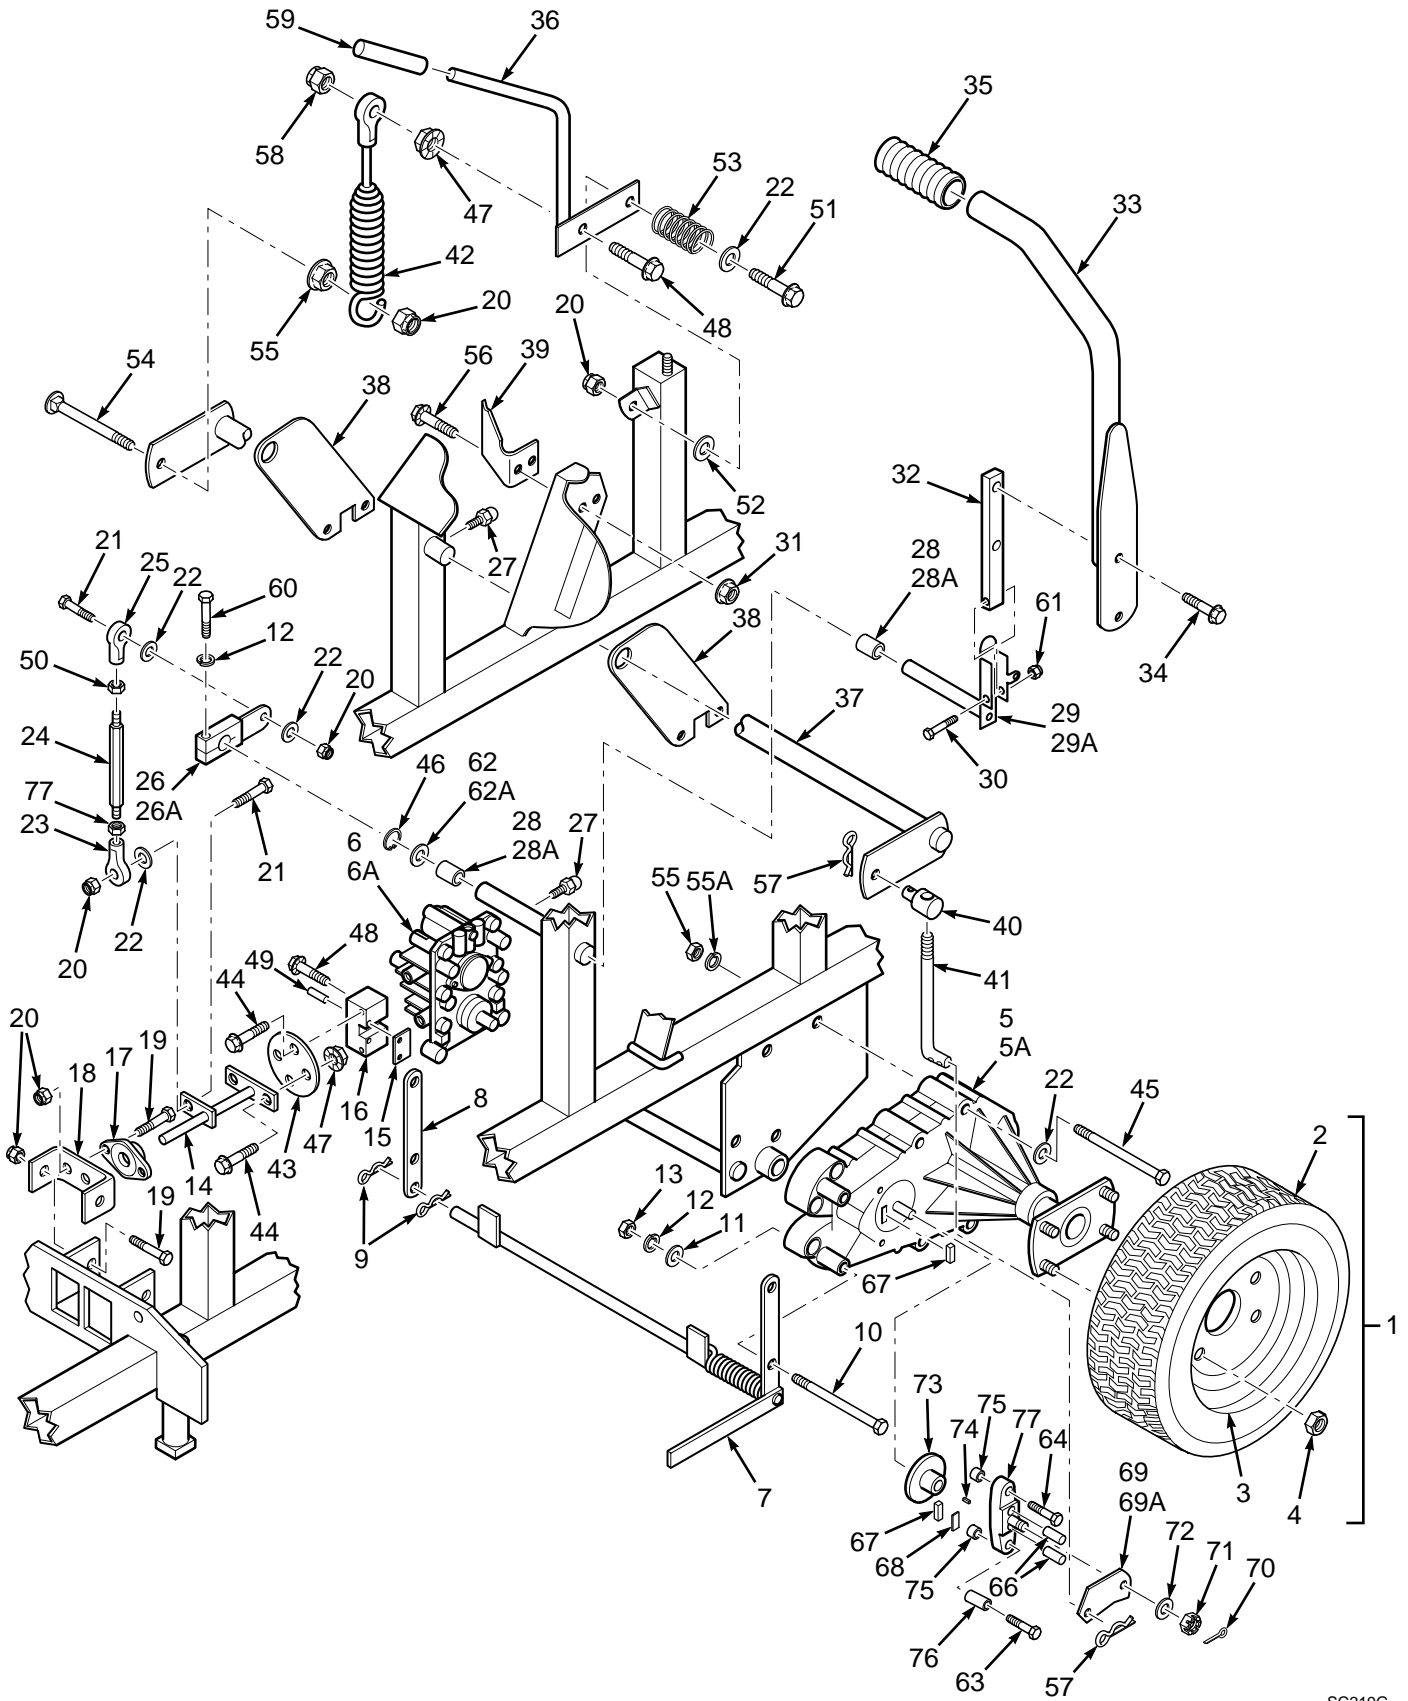

BRAKE AND STEERING CONTROLS - CONT'D

Ref. Part				Ref. Part			
No.	Number	Description	48 52 61	No.	Number	Description	48 52 61
1	48827	Drive Wheel Assembly	X	38	421262	Plate, Parking Brake	X X X
1	48958	Drive Wheel Assembly	X X X	39	421266	Latch, Brake	X X X
2	48827-02	Tire Only	X X X	40	43256	Swivel Joint	X X X
3	48321-04	Rim Only	X	41	44080	Rod, Brake	X X X
3	48958-03	Rim Only	X X X	42	48840	Cable Assembly, Parking Brake	X X X
4	04028-01	Lug Nut, 1/2-20	X X X	43	421238	Plate, Coupler	X X X
5	481097	Axle, LH (Includes brake lever)	X X X	44	04017-05	Bolt, Serrated Flange Hex Hd 1/4-20 x 3/4"	X X X
5A	481098	Axle, RH (Includes brake lever)	X X X	45	*	Bolt, Hex Head 3/8-16 x 4"	X X X
6	48784	Pump, LH	X X X	46	04050-02	Ring, Retaining 3/4" External "E"	X X X
6A	48785	Pump, RH	X X X	47	04019-02	Nut, Serrated Flange Hex 1/4-20	X X X
7	45464	Dump Valve, Lever Weldment	X X X	48	04017-07	Bolt, Serrated Flange Hex Head 1/4-20 x 1-1/4"	X X X
8	421212	Bracket, Mounting	X X X	49	04060-06	Roll Pin, 3/16 x 3/4"	X X X
9	04062-01	Hair Pin	X X X	50	*	Nut, Hex 3/8-24	X X X
10	04001-95	Bolt, Hex Head 5/16-18 x 5"	X X X	51	*	Bolt, Hex Head 3/8-16 x 2"	X X X
11	*	Flatwasher, 5/16"	X X X	52	04041-12	Flatwasher, 3/8 (.375 x 1-1/2" x 16 ga.)	X X X
12	*	Lockwasher, 5/16"	X X X	53	48050	Spring, Brake Lever	X X X
13	*	Nut, Hex 5/16-18	X X X	54	*	Bolt, Carriage 3/8-16 x 1-1/2"	X X X
14	45462	Pump Weldment Shaft	X X X	55	04019-04	Nut, Serrated Flange Hex 3/8-16	X X X
15	421203	Clamp Plate	X X X	56	04017-16	Bolt, Serrated Flange Hex Head 5/16-18 x 3/4"	X X X
16	48829	Block, Pump Control	X X X	57	04062-02	Hair Pin, 1/16"	X X X
17	48796	Bushing, Self Align	X X X	58	*	Nut, Elastic Stop 1/4-20	X X X
18	421204	Bracket, Bearing	X X X	59	48342	Grip, Parking Brake	X X X
19	*	Bolt, Hex Head 3/8-16 x 1"	X X X	60	*	Bolt, Hex Head 5/16-18 x 1-1/2"	X X X
20	*	Nut, Elastic Stop 3/8-16	X X X	61	04021-10	Nut, Elastic Stop 5/16-18	X X X
21	*	Bolt, Hex Head 3/8-16 x 1-1/2"	X X X	62	04041-08	Flatwasher, 3/4"	X X X
22	04041-07	Flatwasher, 3/8" Special	X X X	62A	04041-08S	Flatwasher, 3/4" Special	X X X
23	48544	Ball Joint, LH Thread	X X X	63	HG44612	Bolt, 1/4-20 x 2-1/2 GR. 5 w/patch	X X X
24	43246	Link, Turnbuckle	X X X	64	HG44276	Bolt, 1/4-20 x 1-1/2 GR. 5 w/patch	X X X
25	48464	Ball Joint, RH Thread	X X X	65	04008-02	Bolt, Wheel Mounting	X X X
26	45895	Lever, Pump Transfer LH	X X X	66	HG44127	Pins, Actuating	X X X
26A	45896	Lever, Pump Transfer RH	X X X	67	HG44132	Brake Puck	X X X
27	48114-04	Grease Fitting	X X X	68	HG44134	Backing Plate	X X X
28	48100-06	Bushing, LH	X X X	69	HG44093	Actuating Lever, RH	X X X
28A	48100-05	Bushing, RH	X X X	69A	HG44613	Actuating Lever, LH	X X X
29	45897	Control Lever, LH	X X X	70	*	Pin, Cotter	X X X
29A	45898	Control Lever, RH	X X X	71	HG44142	Nut, Castle	X X X
30	*	Bolt, Hex Head 5/16-18 x 1-1/2"	X X X	72	HG44130	Washer, 7/16 x 7/8 OD x .06 HT	X X X
31	04019-03	Nut, Serrated Flange Hex 5/16-18	X X X	73	HG44090	Disc, Brake	X X X
32	421145	Bar Control Lever	X X X	74	HG44143	Key, Hi Pro 3/16 x 5/8	X X X
33	45437	Control Handle	X X X	75	HG23770	Brake Spacer	X X X
34	04017-27	Bolt, Serrated Flange Hex Head 3/8-16 x 1"	X X X	76	HG23711	Spacer, Torsion Spring	X X X
35	48093	Grip, Control Handle	X X X	77	HG62589	Brake Yoke Assembly	X X X
36	45482	Lever Weldment, Parking Brake	X X X				
37	45551	Cam Weldment, Parking Brake	X X X				

INSTRUMENT PANEL AND ELECTRICAL COMPONENTS

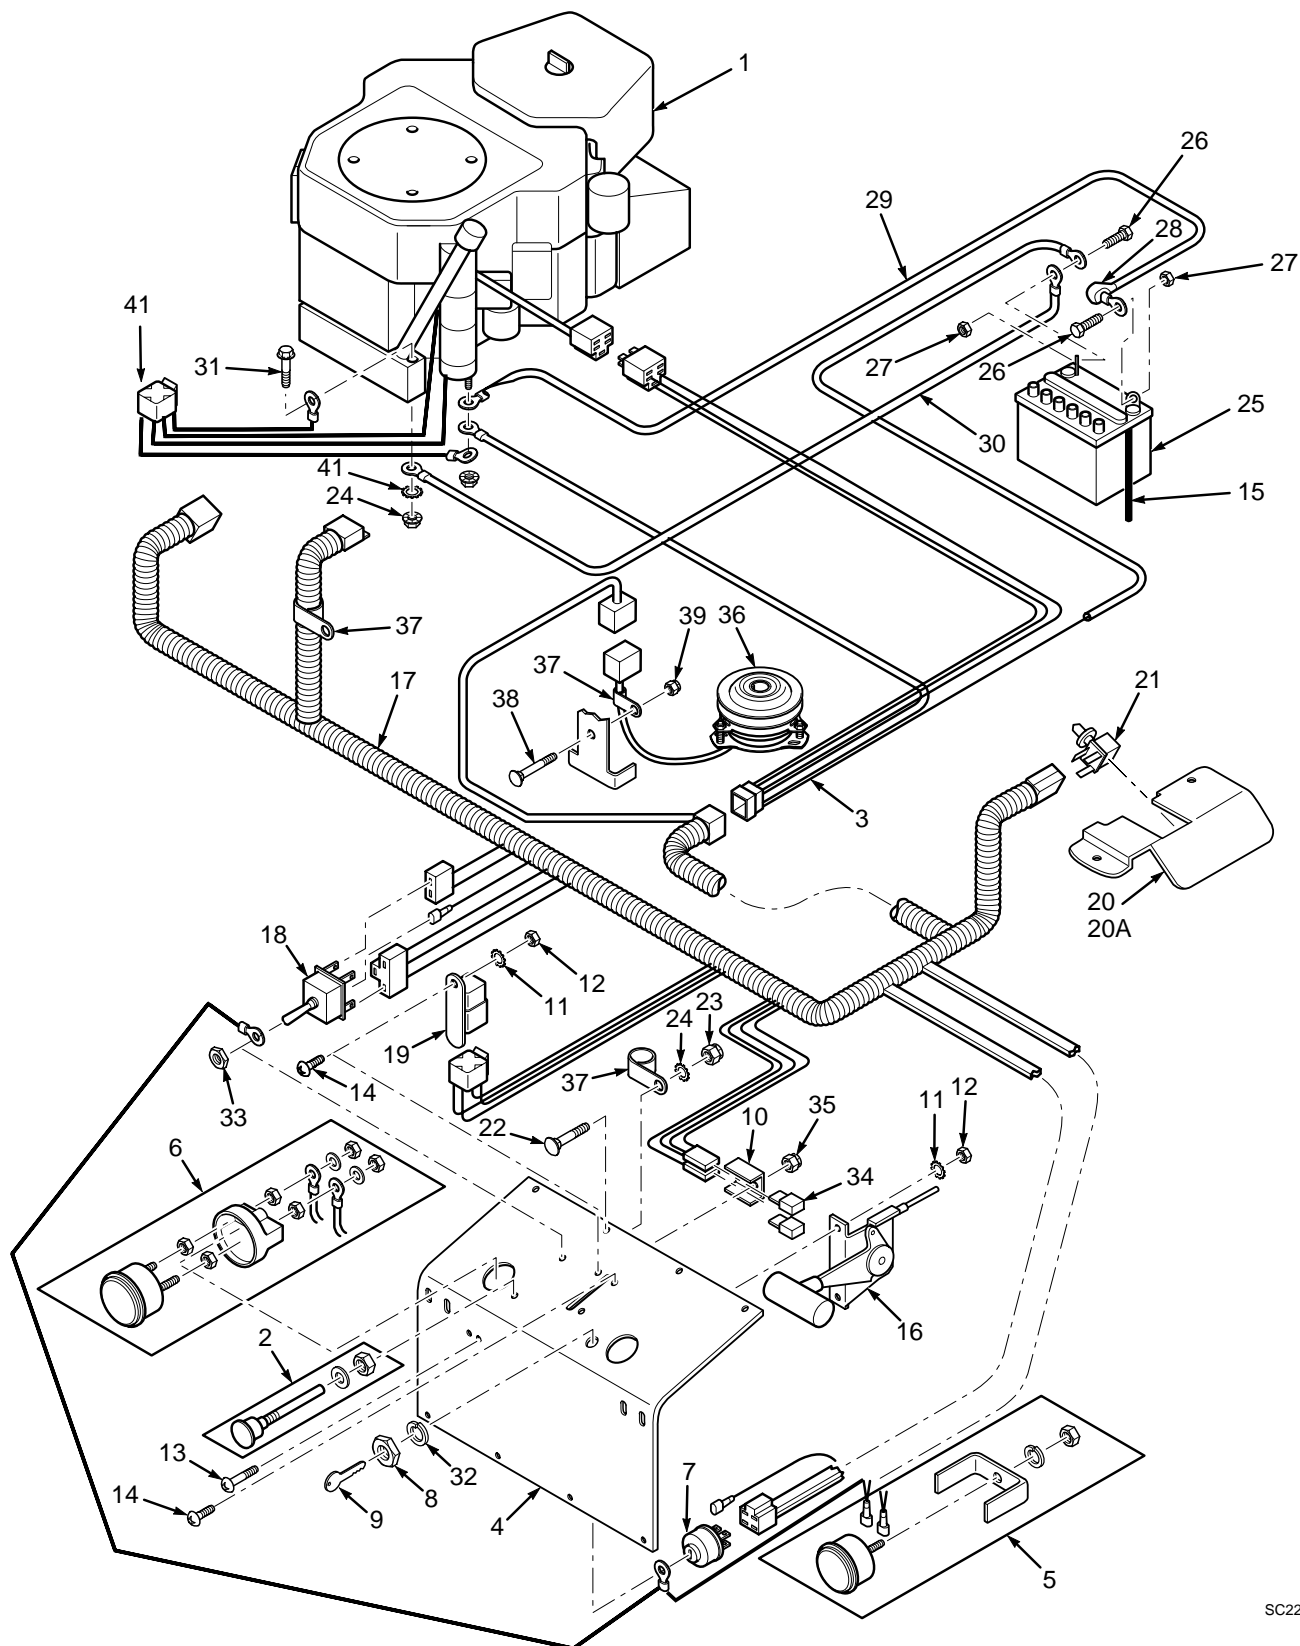

SC220G

INSTRUMENT PANEL AND ELECTRICAL COMPONENTS


Ref. Part No.	Part Number	Description	48	52	61
1	48116	Engine 18 hp Kohler CV (**)	X		
	48970	Engine 20 hp Kohler CV (**)		X	X
	48972	Engine 22 hp Kohler CV (**)		X	X
2	48780	Choke Control	X	X	X
3	481070	Adapter	X	X	X

Ref. Part No.	Part Number	Description	48	52	61
4	421251	Kick Plate	X	X	X
5	48023	Hour Meter	X	X	X
6	48022	Ammeter	X	X	X
7	48798	Key Switch (Includes mounting hardware)	X	X	X
8	48017-04	Nut, Hex 5/8-32	X	X	X
9	48017-02	Key & Ring Assembly	X	X	X
10	42413	Bracket, Fuse Holder	X	X	X
11	04031-01	Lockwasher, #10 External Tooth	X	X	X
12	04020-07	Nut, Hex #10-32	X	X	X
13	04010-11	Screw, Phillips Washer Head #10-32 x 1-1/2"	X	X	X
14	04010-01	Screw, Phillips Washer Head #10-32 x 1/2"	X	X	X
15	48015-01	Overflow Tube	X	X	X
16	48879	Throttle Control	X	X	X
17	481269	Wire Harness	X	X	X
18	48787	Switch, Mower Engagement Electric Clutch	X	X	X
19	48788	Relay	X	X	X
20	421253	Neutral Lock Bracket, RH	X	X	X
20A	421252	Neutral Lock Bracket, LH	X	X	X
21	48522	Switch Neutral Lock	X	X	X
22	04003-12	Bolt, Carriage 5/16-18 x .75"	X	X	X
23	04021-10	Nut, Elastic Stop 5/16-18	X	X	X
24	04019-03	Nut, Serrated Flange Hex 5/16-18	X	X	X
25	48015	Battery	X	X	X
26	04001-44	Bolt, Hex Head 1/4-20 x 1/2"	X	X	X
27	04020-02	Nut, Hex 1/4-20	X	X	X
28	48126	Rubber Boot	X	X	X
29	48029-13	Battery Cable, 25" Red	X	X	X
30	48029-11	Battery Cable, 27" Black	X	X	X
31	04017-19	Bolt, Serrated Flange Hex Head 5/16-18 x 1.50"	X	X	X
32	48017-03	Lockwasher, 5/8" Internal	X	X	X
33	48787-01	Nut, Hex 1/2-27	X	X	X
34	48298	Fuse, Blade Type 20 amp	X	X	X
35	04021-01	Nut, Elastic Stop #10-32	X	X	X
36	48786	Electric Clutch	X	X	X
37	48030-09	Clamp	X	X	X
38	04003-12	Bolt, Carriage 5/16-18 x 3/4"	X	X	X
39	04021-10	Nut, Elastic Stop 5/16-18	X	X	X
40	04031-09	Lockwasher, 5/16" Internal Tooth	X	X	X
41	481275	Wire Harness W/Relay	X	X	X

* Common hardware which should be purchased locally. All bolts Grade 5 plated, all other fasteners zinc plated.

** Contact engine manufacturer for replacement engine.

ELECTRICAL WIRING DIAGRAM - KOHLER

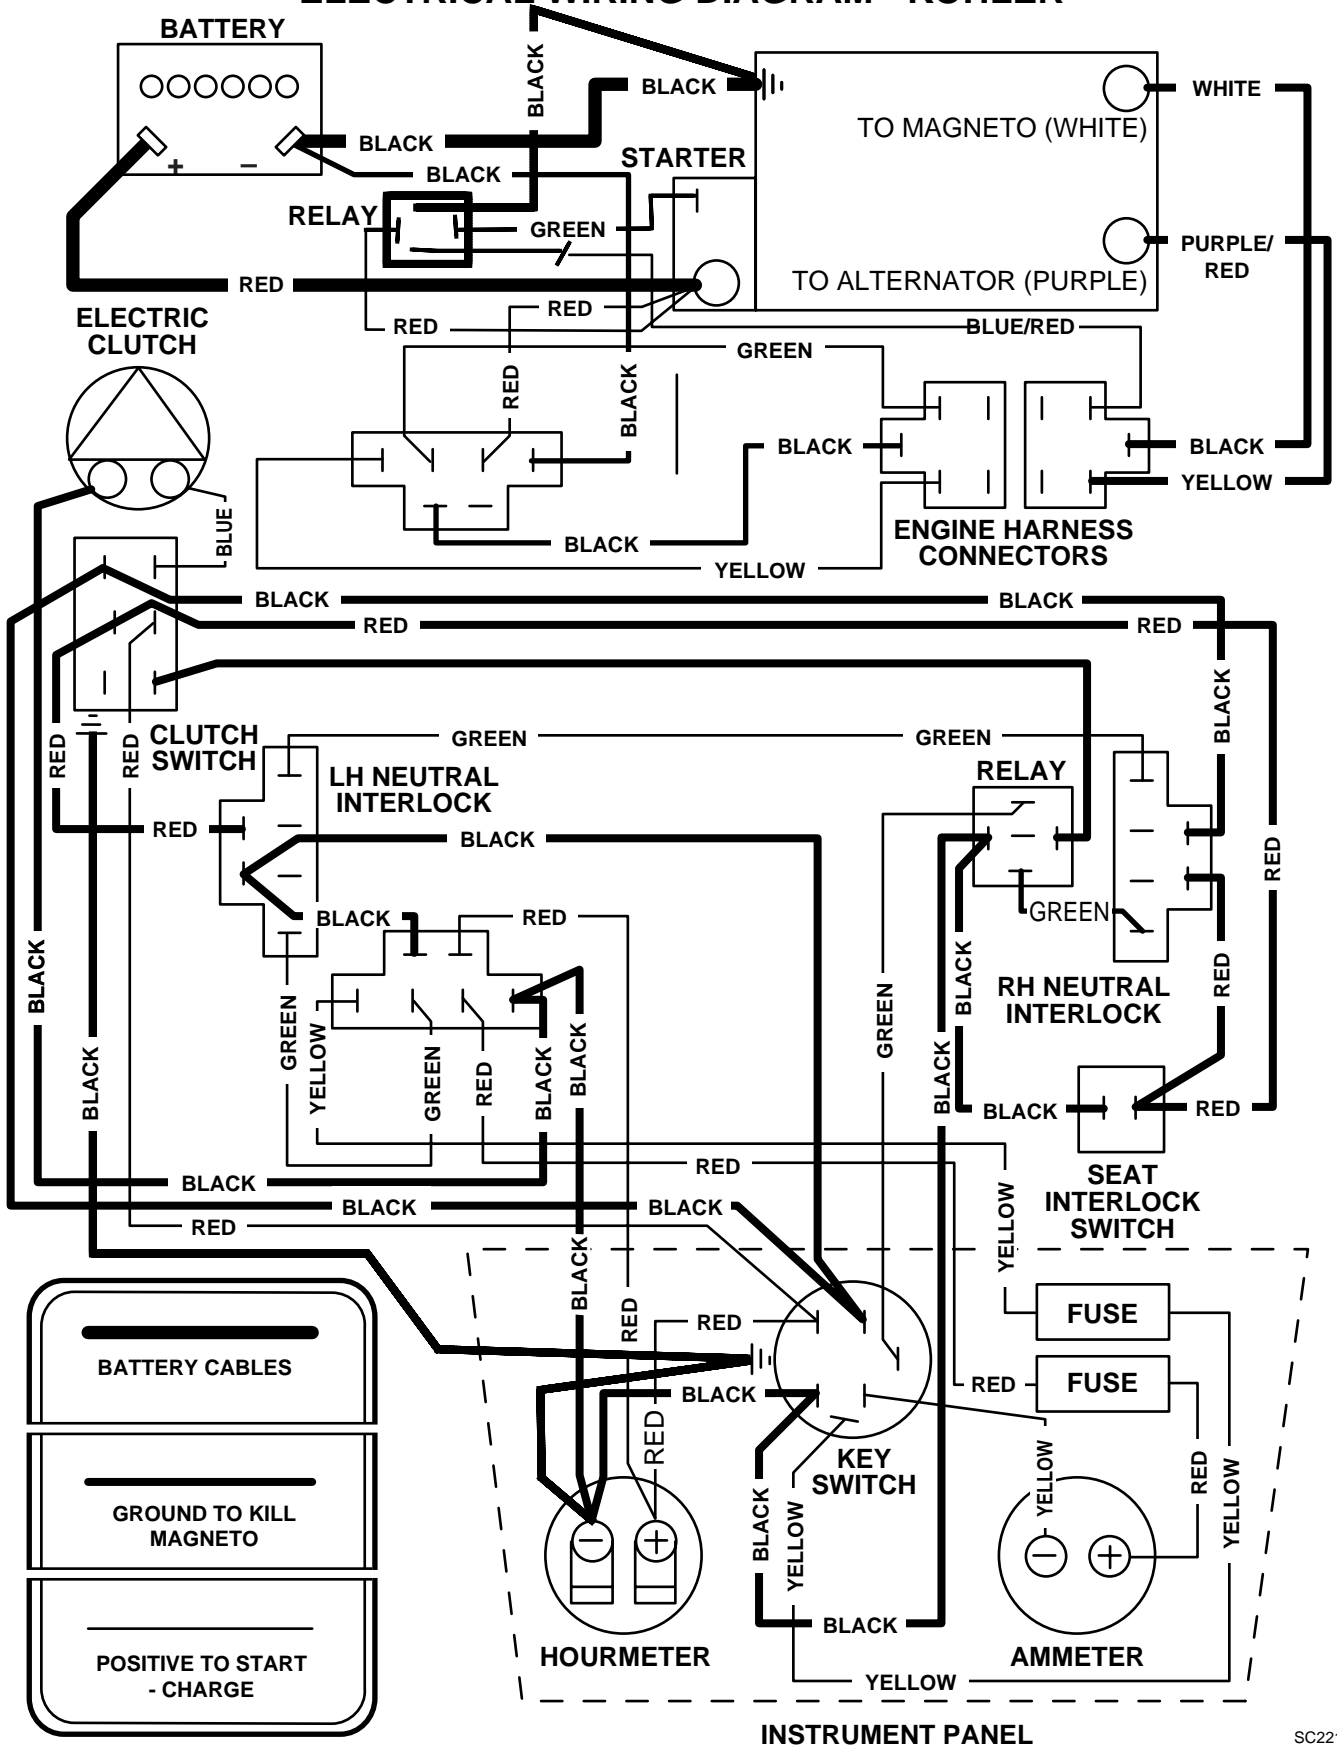

SC221G

REPLACEMENT DECALS




48556 - Size 12" x 3.25"



48623 - Size 12" x 3.25"



48072

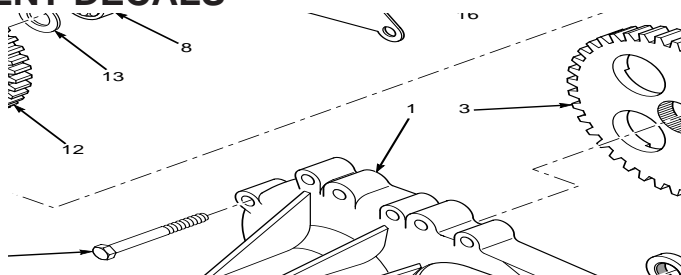

48859 - Size 11.5" x 5.5"



48404

48318-48"
48319-52"
48320-61"

IMPORTANT ADJUSTMENT PROCEDURES

READ OPERATOR'S MANUAL FOR MORE DETAILS



FREE WHEEL OPERATION

To move machine without running the engine, locate dump valve lever under fender in front of left drive wheel. Unhook and push forward to free wheel. Pull lever back and rehook for normal operation.

WARNING




INSTALL BELT COVER BEFORE
OPERATING MACHINE

READ OPERATOR'S MANUAL

STRAIGHT-LINE RUNNING OR TRACKING ADJUSTMENT

Before making adjustment, be sure both drive tires are inflated equally. Loosen nut (D) on LH pump linkage. If machine pulls to right, move forward in slot to slow left wheel. If machine pulls to left, move rearward in slot to speed up left wheel. Readjust neutral if necessary.




NEUTRAL ADJUSTMENT

Adjust neutral only with drive wheels elevated and machine blocked securely. Loosen jam nut (B) on the turnbuckle. If wheel rotates forward, adjust turnbuckle (C) clockwise. If wheel rotates rearward, adjust turnbuckle counterclockwise. Adjust until drive wheel stops turning. Tighten jam nut.

HYDRAULIC FLUID LEVEL

Check hydraulic fluid level daily while fluid is cool. Fluid level should be 2" below top of tank. Fill with SAE 20W50 motor oil only.




IMPORTANT!:

Do not overfill. Room for hot fluid expansion must be allowed or resulting expansion may cause leaks in the system.

481041


REPLACEMENT DECALS

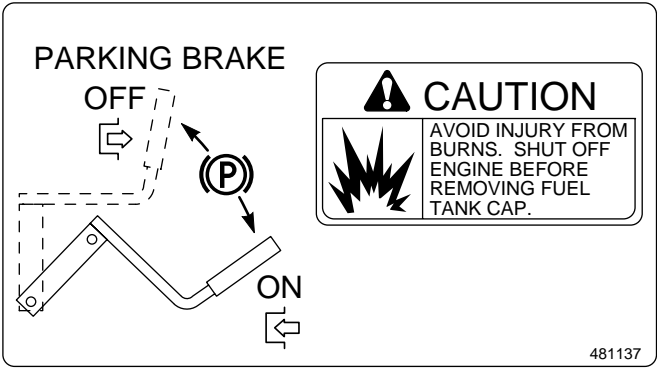

481137




481039

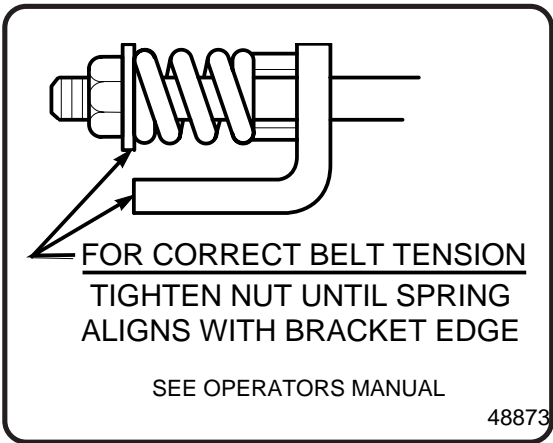

48873



481040

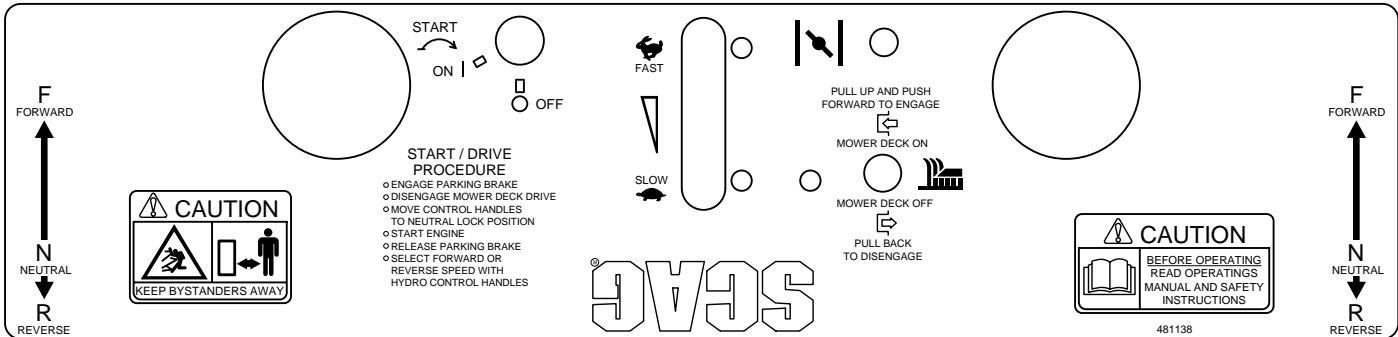


481138

REPLACEMENT DECALS



481099

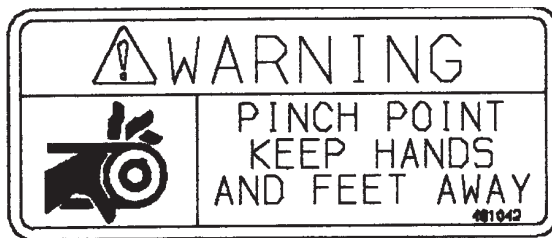


481042



48071



48825 - Size 8.5" x 2"

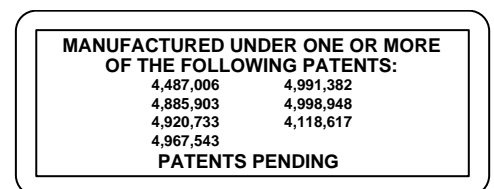

48656

48656

SPECIFICATIONS FOR SCAG SSZ ZERO-TURN RIDER

MODELS:SSZ-18CV, SSZ-20CV, SSZ-22CV

ENGINE

General Type:	Heavy duty industrial/commercial
Brand:	Kohler
Model:	Kohler 18CV, 20CV, 22CV Command Vertical Engine
Horsepower:	18HP, 20HP, 22HP @ 3600 RPM
Type:	4 cycle gas, twin cylinder, vertical shaft engine
Displacement:	18HP=624 cc, 20HP=624cc, 22HP=624cc
Cylinders:	2 cast-iron sleeves
Governor:	Mechanical type governor with variable speed control set at 3600 rpm (\pm 100rpm), idle set at 1400 rpm
Air Cleaner:	Large capacity dual element, chopper-type grass screen
Exhaust:	Single exhaust canister muffler
Fuel Pump Group:	Mechanical fuel pump with inline fuel filter, fixed jet carburetor with Smart- Choke™ and fuel shutdown solenoid
Valve Group:	Kohler-hydraulic valve lifters standard
Starter/Electrical:	12 volt battery with alternator, solid state ignition with key start
Charging System:	15 amp

ENGINE DECK

Fuel Tank:	5 gallon (19.0 litres) seamless polyethylene tank with fuel gauge gas cap
Drive Wheels/Tires:	20x10.0-8 four-ply pneumatic tubeless, radius edge, offset rims to improve operator's view
Parking Brake:	Lever operated integral disc brake
Frame:	Compact tractor frame with structural steel tubing construction

DRIVE SYSTEM

Type:	Hydro drive with two hydrostatic transmissions for independent control of each drive wheel
Hydrostatic Transmissions:	Two Hydro-Gear Model #BDU 10L with integral pump/motor and axle
Transmission Belt Idler:	Self-adjusting, self-tightening
Dump Valve:	Single lever, allows for movement without engine running
Hydro Fluid Cooling Group:	6 qt. capacity nylon fluid reservoir, uses SAE 20W50 fluid and 10 micron filter, fan driven off pump drive belt cools fins on pump/motor transmission
Steering/Travel Control:	Twin lever fingertip steering control with individual control to each wheel
Axles:	1" heavy-duty, heat-treated flanged axle
Wire Harness:	14 gauge wire
Safety Group:	Seat actuated engine kill, neutral interlock, mower engagement (BBC) switch with interlock
Instrument Panel:	Ammeter, hour meter, key switch, throttle, fuses, manual choke, BBC switch
Forward Speed Range:	0 to 6.8 mph
Reverse Speed Range:	0 to 3.5 mph

SPECIFICATIONS FOR SCAG SSZ ZERO-TURN RIDER

MODELS:SSZ-18CV,SSZ-20CV, SSZ-22CV

CUTTER DECK

Type:

SMZ 48, SMZ 52, SMZ 61

Construction:

Floating, adjustable, anti-scalping, hybrid design combines out-front and belly-mount designs

True Cutting Width:

10-gauge steel with 7-gauge (3/16") steel skirt

Cutting Height Adjustment:

48.0" (122.0 cm), 52" (132.0 cm), 61: (155.0 cm)

Cutter Blades:

Hand operated lever adjustment from operator's seat, 1-3/4" to 4-1/2" in 1/2" increments

.204 thick, milled edge, 5150 alloy steel

SMZ 48: Three (3) 16.5" blades

SMZ 52: Three (3) 18 blades

SMZ 61: Three (3) 21" blades

Blade Engagement:

Electric blade engagement clutch with control panel switch

Discharge Opening:

Extra wide 11.5" discharge opening with spring loaded discharge chute

Caster Wheels:

12x 3.5" with quick pin removal

Spindles:

Heavy duty 1-1/8" top dimension spindle shaft, cast housing, taper roller bearing, low maintenance with top access grease fitting and grease overfill relief poppet

Spindle Pulleys:

Cast-iron with easily removed taper hubs

Cutter Deck Belts:

B-section with Kevlar cord

ADDITIONAL SPECIFICATIONS

Seat:

Padded with arm rests

OPTIONAL ITEMS/ATTACHMENTS

Grass Catcher:

Spindle driven GC-SSZ-48 has 48 gallon capacity molded plastic hopper. GC-SSZ-5BS has 5 HP Briggs auxillary engine, 48 gallon capacity molded plastic hopper.

Mulching Plate:

Steel plate fits over discharge opening. No blade change or removal required. Installs and removes in the field.

APPROXIMATE DIMENSIONS

Length:

SMZ 48

SMZ 52

SMZ 61

Tracking Width:

72.0"

77.0"

77.0"

Width:

46.0"

49.0"

49.0"

Width (with discharge chute up):

59.0"

64.5"

73.5"

Height:

49.0"

53.0"

62.0"

Turning Radius:

48.0"

51.0"

51.0"

Weight:

zero

zero

zero

Weight with GC-SSZ-48:

790 lbs.

835 lbs.

865 lbs.

Width with GC-SSZ-48

1060 lbs.

Length with GC-SSZ-48:

59.0"

Weight with GC-SSZ-5BS:

78.0"

1055 lbs.

1085 lbs.

Width with GC-SSZ-5BS:

73.5"

82.5"

Length with GC-SSZ-5BS:

83.0"

83.0"

LIMITED WARRANTY-COMMERCIAL EQUIPMENT

Any part of the Scag commercial mower manufactured by Scag Power Equipment and found, in the reasonable judgment of Scag, to be defective in materials or workmanship, will be repaired or replaced by an Authorized Scag Service Dealer without charge for parts and labor. This warranty is limited to the original purchaser and is not transferable. Proof of purchase will be required by the dealer to substantiate any warranty claims. All warranty work must be performed by an Authorized Scag Service Dealer.

This warranty is limited to the following specified periods from the date of the original retail purchase for defects in materials or workmanship:

- * Wear items including drive belts, blades, hoses and tires are warranted for 90 days.
- * Batteries are covered for 90 days.
- * Frame, deck, and structural components including oil reservoir, fittings, and oil cooler are warranted for 1 year.
- * Engines and electric starters are covered by the manufacturer's warranty period.
- * Drive system components are warranted for 1 year by the component manufacturer, in conjunction with Scag Power Equipment. (Excluding fittings, hoses, cooling system, oil reservoir, drive belts).
- * Electric clutch components are warranted for 1 year.
- * Cutter Spindle Assemblies 46631 have a Limited Warranty for three years (Parts and labor 1st year; Parts only 2nd and 3rd year).

Any Scag product used for rental purposes is covered by a 90 day warranty.

The Scag mower, including any defective part must be returned to an Authorized Scag Service Dealer within the warranty period. The expense of delivering the mower to the dealer for warranty work and the expense of returning it to the owner after repair will be paid for by the owner. Scag's responsibility is limited to making the required repairs and no claim of breach of warranty shall be cause for cancellation or rescission of the contract of sale of any Scag mower.

This warranty does not cover any mower that has been subject to misuse, neglect, negligence, or accident, or that has been operated in any way contrary to the operating instructions as specified in the Operator's Manual. The warranty does not apply to any damage to the mower that is the result of improper maintenance, or to any mower or parts that have not been assembled or installed as specified in the Operator's Manual and Assembly Manual. The warranty does not cover any mower that has been altered or modified, changing performance or durability. In addition, the warranty does not extend to repairs made necessary by normal wear, or by the use of parts or accessories which, in the reasonable judgment of Scag, are either incompatible with the Scag mower or adversely affect its operation, performance or durability.

Scag Power Equipment reserves the right to change or improve the design of any mower without assuming any obligation to modify any mower previously manufactured.

All other implied warranties are limited in duration to the one (1) year warranty period or ninety (90) days for mowers used for rental purpose. Accordingly, any such implied warranties including merchantability, fitness for a particular purpose, or otherwise, are disclaimed in their entirety after the expiration of the appropriate one year or ninety day warranty period. Scag's obligation under this warranty is strictly and exclusively limited to the repair or replacement of defective parts and Scag does not assume or authorize anyone to assume for them any other obligation. Some states do not allow limitations on how long an implied warranty lasts, so the above limitation may not apply to you.

Scag assumes no responsibility for incidental, consequential or other damages including, but not limited to, expense for gasoline, expense of delivering the mower to an Authorized Scag Service Dealer and expense of returning it to the owner, mechanic's travel time, telephone or telegram charges, rental of a like product during the time warranty repairs are being performed, travel, loss or damage to personal property, loss of revenue, loss of use of the mower, loss of time or inconvenience. Some states do not allow the exclusion or limitation of incidental or consequential damages, so the above limitation or exclusion may not apply to you.

This warranty gives you specific legal rights, and you may also have other rights which vary from state to state.

